



USBAM/MINI USB 5PIN M, OD:4.0MM
L=1035MM BLACK.

NO.	DRW	DATE	REV	NOTE
1	ZhouYi.Juan	2009/04/03	A/A	Initial Drawing
2				

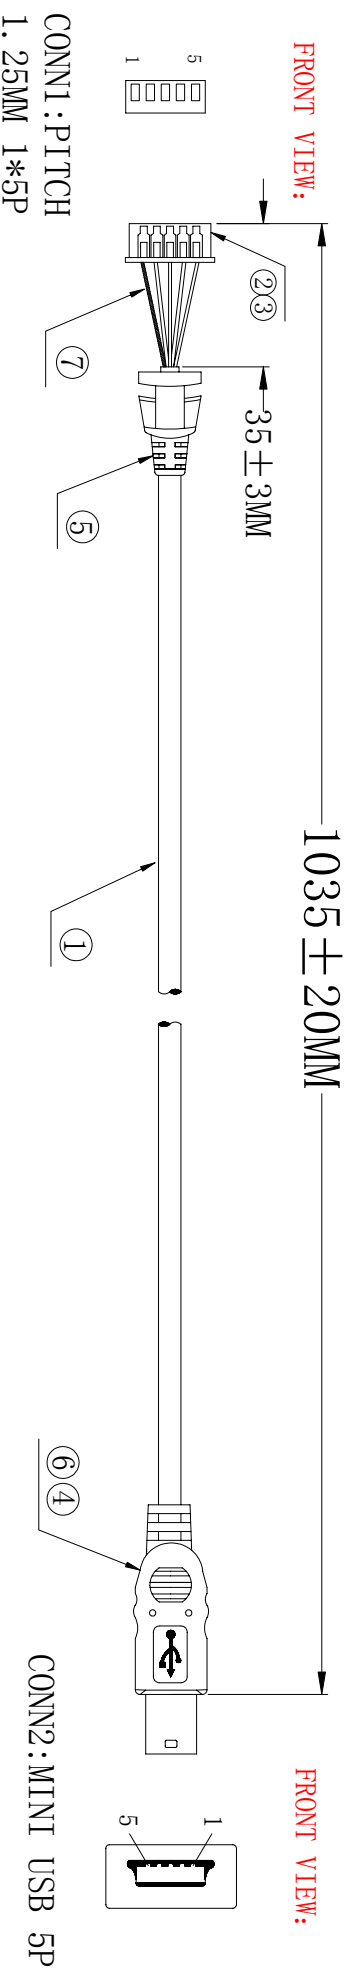

1. WIRING:
- | | |
|---------|---------|
| CONN1 | CONN2 |
| 1 ----- | 1 RED |
| 2 ----- | 2 WHITE |
| 3 ----- | 3 GREEN |
| 4 ----- | 5 BLACK |
| 5 ----- | G DRAIN |

2. PACKING:

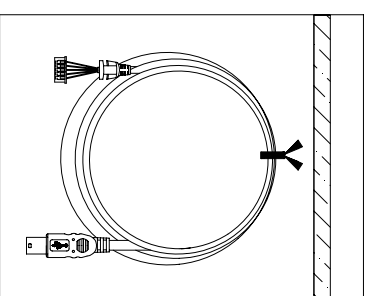

NO.	PART NO.	DESCRIPTION	Q'TY	UNIT
1	CABLE	UL2725, 28AWG*1P+28AWG*2C+AEBB OD=4.0MM BLACK, L=1035MM	1	PC
2	HOUSING	MINI 5P MALE, SHELL NICKEL YEON-HO P/N: 12505HS-5P.	1	PC
3	TERMINAL	TIN-PLATED, 28-32AWG.	5	PC
4	CONNECTOR	MINI 5P MALE, SHELL NICKEL PLATED WITH SOLDER.	1	PC
5	SR	45P PVC, COLOR:BLACK	1	10G
6	PVC	45P PVC, COLOR:BLACK	1	7G
7	H. S. TUBE	L=35MM, COLOR:BLACK	1	PC

Wellco T&C Co., Ltd.

CUSTOMER	DATE	PAGE	1/1
DRW ZhouYi.Juan	PRODUCT 1.25MM 5P/MINI 5PIN	RATIO	1:1
CHECK	SCAL	REV	A
APP	DATE 2009/04/03	Draw NO.	

