




4

3


2

1

REV.	ECN NO.	DATE
00	New specifications	12.05.22

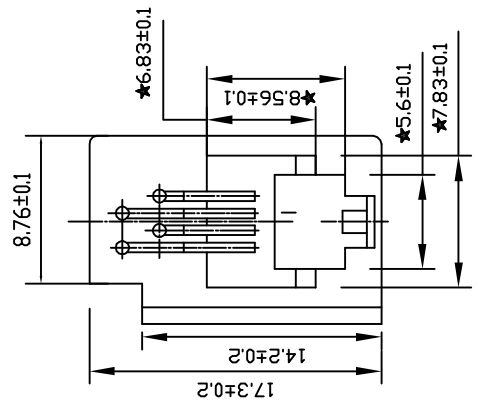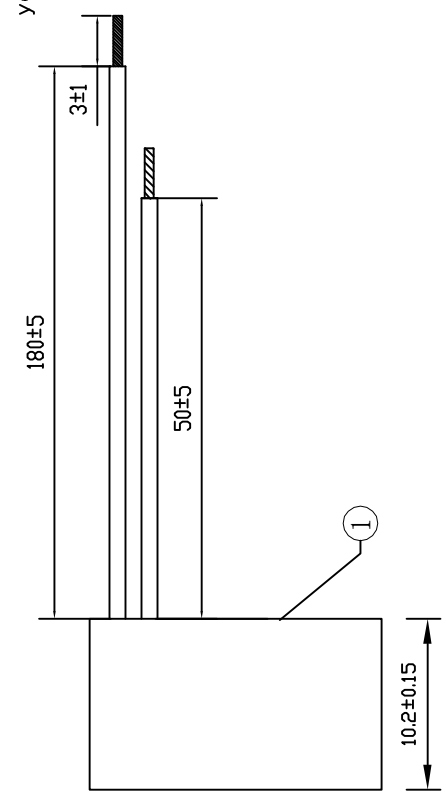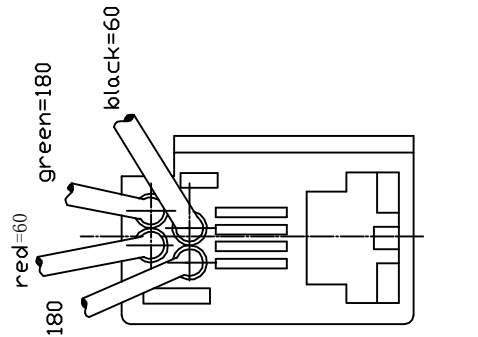

B

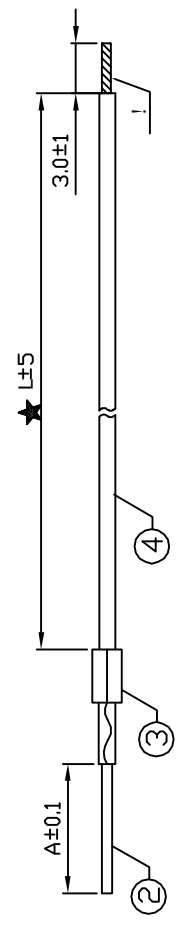

B

- Technical requirements:
1. The socket adjacent insulation resistance between the normal amount not less than 1000 M Ω.
 2. The adjacent normal compression strength can bear AC1000V. A minutes without breakdown or fly arc phenomenon.
 3. Mechanical life not less than 750 times.

C

4	HO4-A0134	Electronic line	UL1061 26AWG 7*0.16
3	1G910-G010	Terminals	Brass
2	EO01-JGF-001	Gold Line	Phosphor copper surface after nickel plating gold-plated GF
1	1D203N-A44-F013	616E JACK 4P4C	UL94V-2 GRAY

C

RoHS Compliant		MATERIAL: see table		Designed:		NAME: ^{616E} JACK ^{4P4C} green black red yellow	
TOLERANCES		FINISH: see table		Checked:		DWG NO: 12052202	
0~30 ±0.16		ANGLES: ±1°		Approved:		PART NO: 12052202	
30~ ±0.25		SHEET 1 OF 1				REV.	
						00	

Wellco T&C Co., Ltd.

FIRST ANGLE PROJECTION	SCALE	UNIT	CUSTOMER:
A4	1:1	mm	MODEL NO:

4

3

2

1

QRK-02