



MAK.	QUA.	Description	REV.	DRW.	S
A					
B					

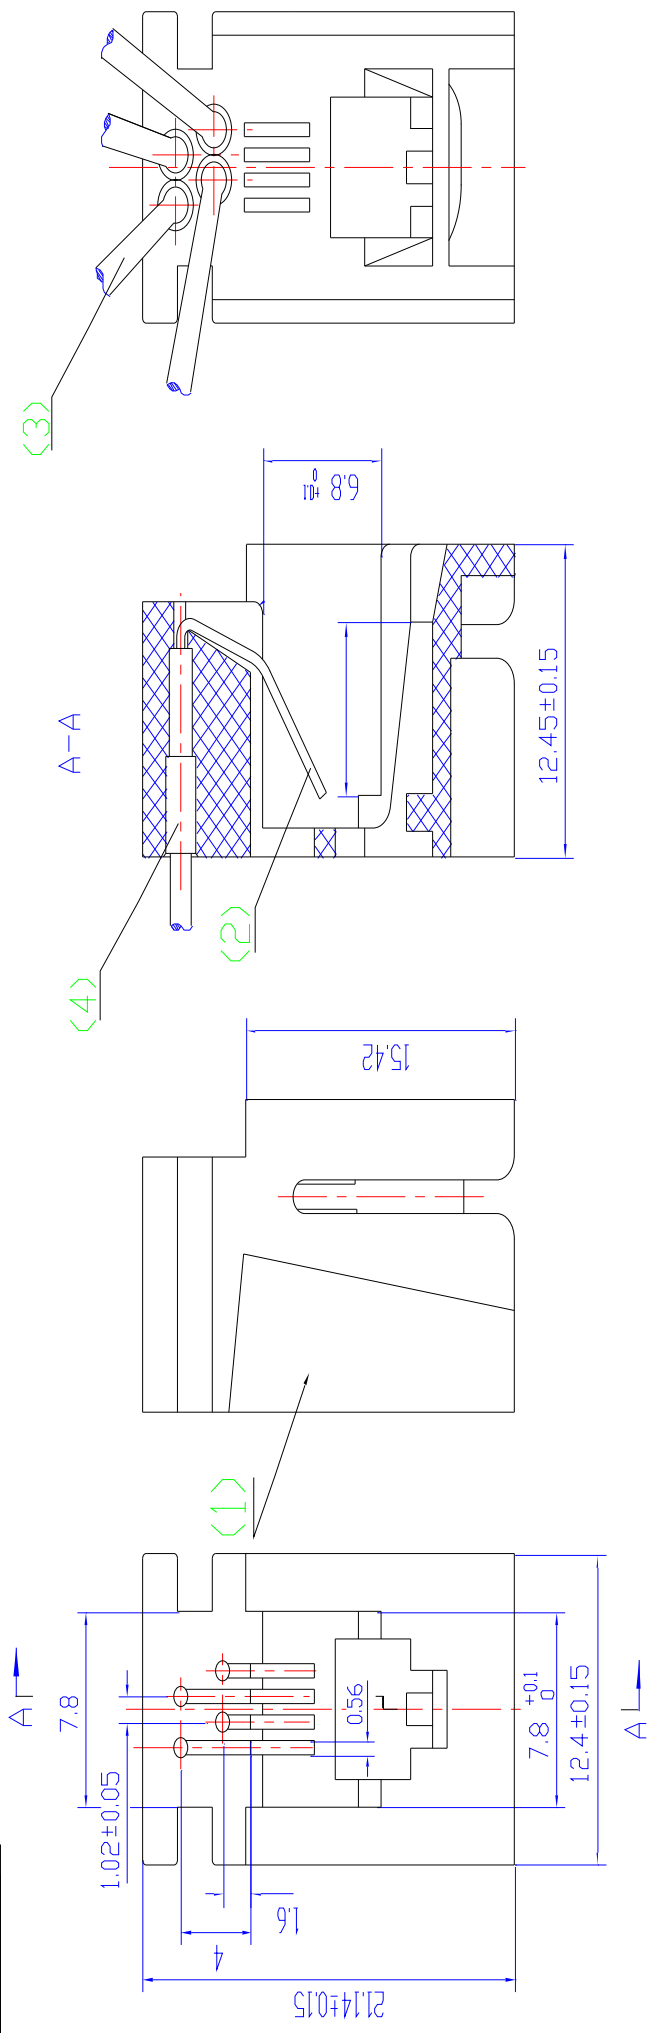

Specification

- Insulation Resistance: 1000 Megohms min.
- Withstand Voltage: 1000V, AC/minute
- Durability: 600 mating circles min.
- Tolerances unless otherwise specified: 0~10: ±0.1; 10~20: ±0.15; 20~30: ±0.2
- Selective Gold-plating: (3;6;15;30;50) micro inch

(4)	Terminal	2j4	Brass
(3)	wire	pin	UL 1061 26AWG
(2)		2	Phosphor Bronze
(1)	Housing	1	A B S
No.	Part Name	QTY	Material
			Strand wire
			Gold-plating over Nickel
			rk

	<h1>Wellco T&C Co., Ltd.</h1>		Gen. Tolerance	Scale	Not	P/N # 616P	This spec drawing is under the property of Wellco T&C Co., Ltd.	DRW by	AMY July 23 2008
	.X ± 0.20	mm	Jack	Rev. A	CHK by	Long July 24 2008			
	.XX ± 0.08	mm		Page 1-1	APP by	Chin July 24 2008			
	.XXX ± 0.05	mm							
	$\angle \pm 1^\circ$								

RoHS
Compatible