

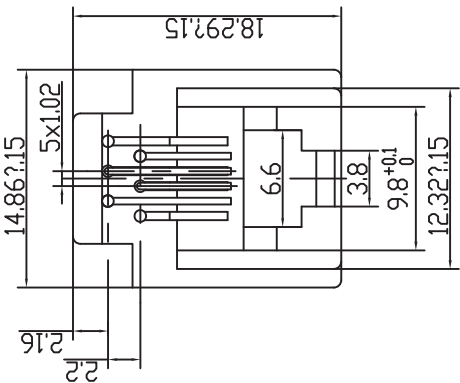
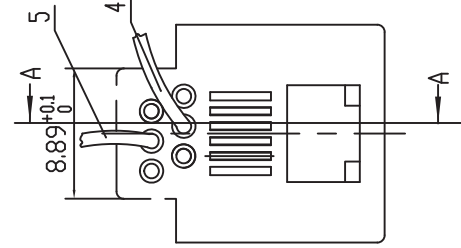


AWM 1061 E170689 VW-1 80°C 300V  
26AWG XIN YA CSA AWM 1A LL109915  
FT18°C 300V 26AWG -F-

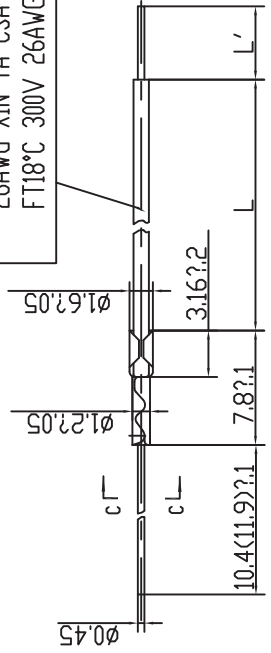

5	PVC	BROWN	1061	AWG26	7/0.15	60±3mm	3±0.5mm TIN
4	PVC	YELLOW	1061	AWG26	7/0.15	60±3mm	3±0.5mm TIN
3	PHOSPHOR BRONE						
2	COPPER ALLOY						
1	ABS	GRAY	UL94V-0				
NO.	MATERIAL	COLOUR	UL ST.	AWG	STR	L	L'
				623K-6P2C-60mm-3T		PQJ1T039MA-ZV	
				Drawing Marking		Weight Scale	
				Common Page		Page	
Design			Criterion				
Collate			Examine				
Examine			Approval				
Technics			Date				

### Specification

1. Wire sequence and wire color length can do according to with customer's requirements
2. Use "UL" wire
3. No special requirement dimension tolerance: ±0.15mm

**Welco T&C Co., Ltd.**

Enrol

Tracing

Tracing

Signing

Date