


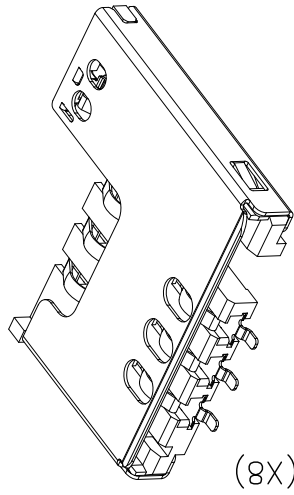


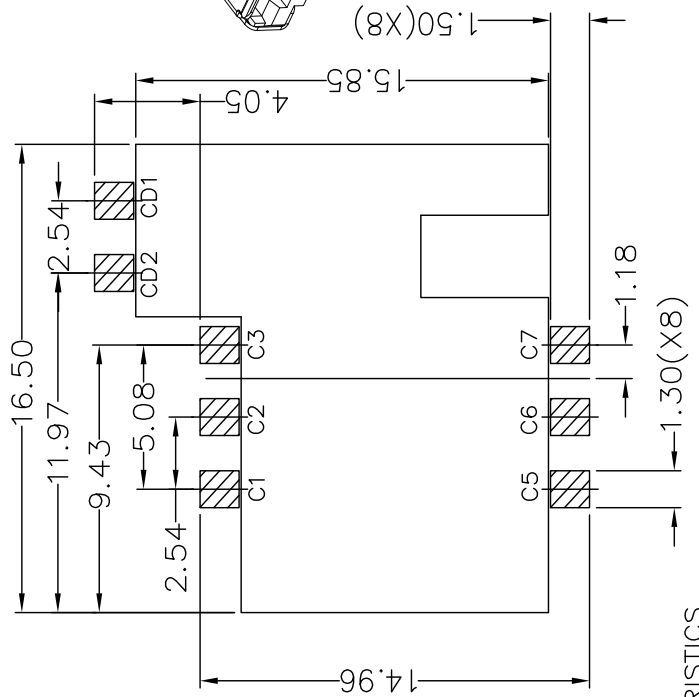

| MAK. | Q.U.A. | Description | REV. | DRW. |
|------|--------|-------------|------|------|
| A | | | | |
| B | | | | |

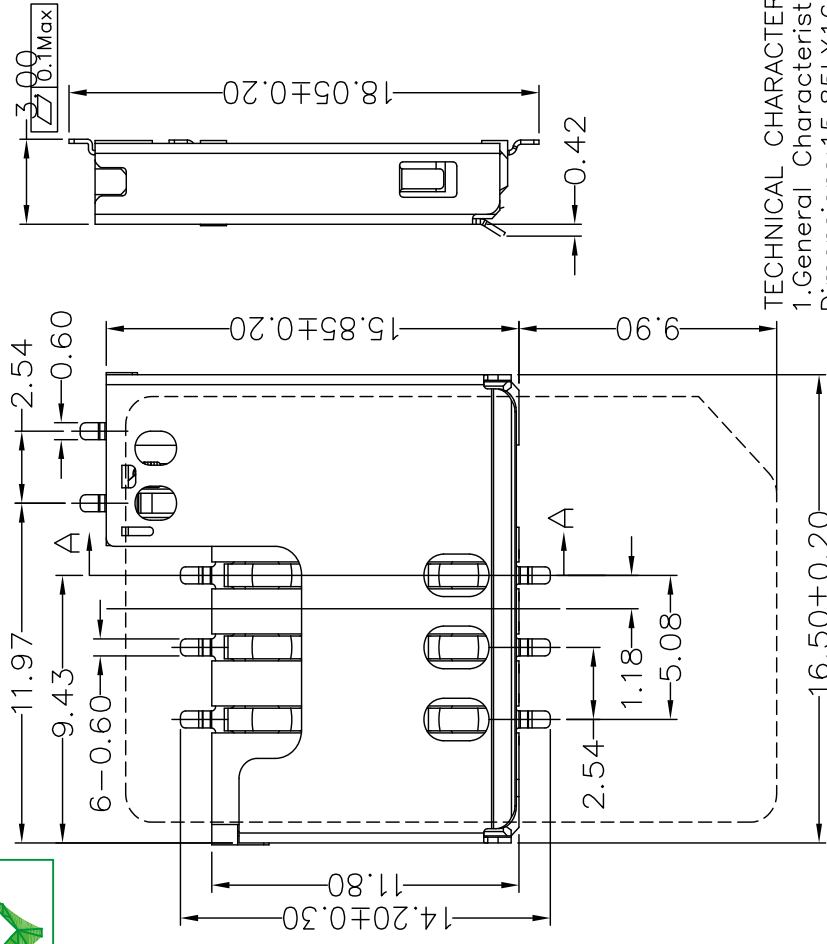


| ELECTRIC FUNCTION | DETECT SWITCH |
|-------------------|---------------|
| WITHOUT CARD | OPEN |
| CARD INSERTED | CLOSED |

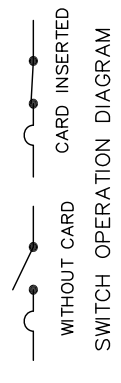

TECHNICAL CHARACTERISTICS

- General Characteristics
Dimensions: 15.85L x 16.50W x 3.00H mm
Weight: Approx 0.78±0.2g
Durability: 5,000 cycles min.
- Electrical Characteristics
Contact resistance:
50mΩ typical 100mΩ max
Insulation resistance:
> 1000MΩ/500V DC
3. Solderability
Vapor phase: 215°C, 30sec. Max
IR reflow: 250°C, 5sec. Max
Manual soldering: 370°C, 3sec. Max
- Environmental Characteristics
Operating temperature:
-40°C ~ +85°C
Operating humidity: 10% ~ +95%RH

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE (TOLERANCE ±0.05)

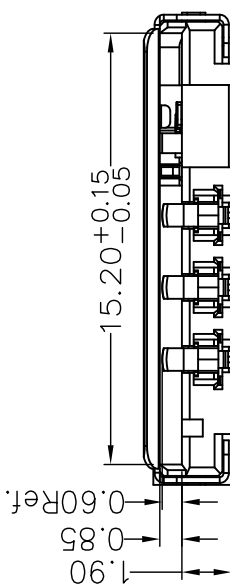

| ITEM | PART NAME | Q'TY | MATERIAL | FINISH |
|------|------------------|------|-----------------------|---------------------------|
| 1 | BASE | 1 | Hi-temp Thermoplastic | Black UL94V-0 |
| 2 | COVER | 1 | Stainless Steel | |
| 3 | DATA CONTACT | 6 | Copper Alloy | Contact area: Gold plated |
| 4 | SWITCH CONTACT 2 | 1 | Copper Alloy | Contact area: Gold plated |
| 5 | SWITCH CONTACT 1 | 1 | Copper Alloy | Contact area: Gold plated |



Wellco T&C Co., Ltd.

| Gen.Tolerance | Scale | Unit | Size |
|---------------|-------|------|------|
| .X ± 0.20 | Not | mm | |
| .XX ± 0.08 | | | |
| .XXX ± 0.05 | | | |
| ∠±1° | | | |

P/N # 727-NO-NP
Sim card connector

| | | | |
|---|--|----------|--------------------------|
| This spec drawing is under the property of Wellco T&C Co., Ltd. | | Rev. A | DRW by Amy June 16 2015 |
| | | Page 1-1 | CHK by Long June 20 2015 |
| | | | APP by Chin June 21 2015 |