

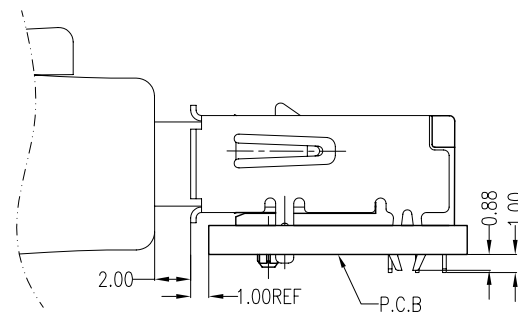
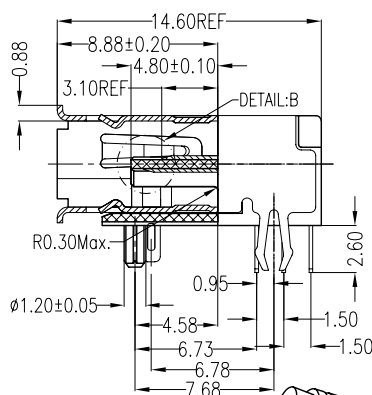
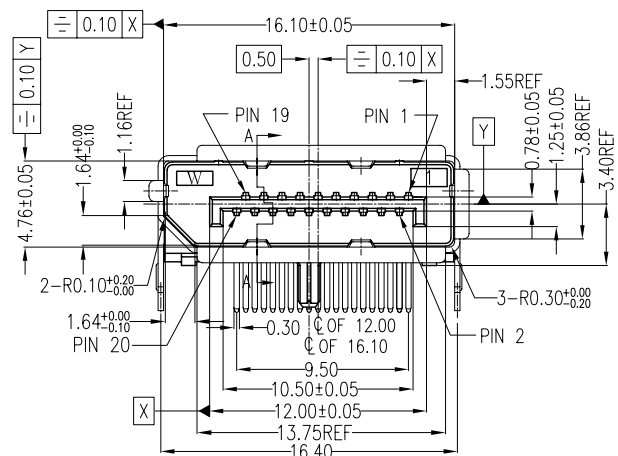


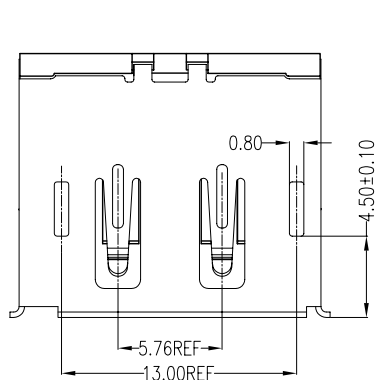
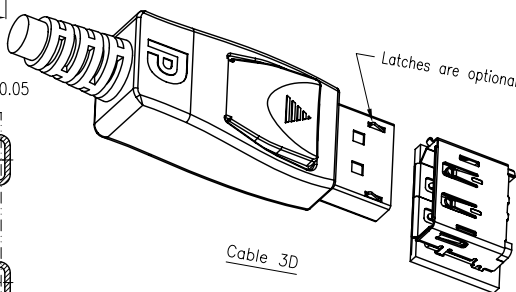


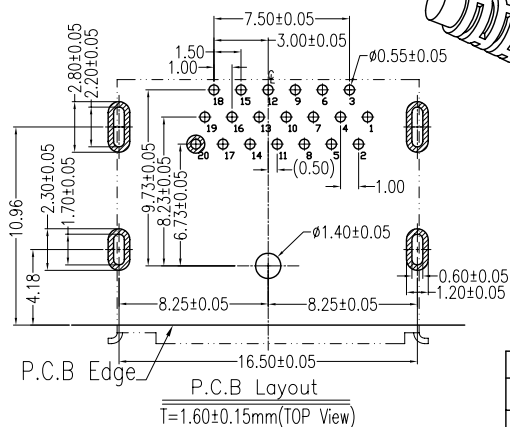

Fully mated condition

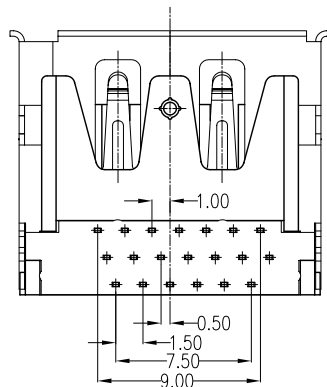

Pin No.	Signal Type	Pin No.	Signal Type
1	In	11	GND
2	GND	12	In
3	In	13	CONFIG(see note 1)
4	In	14	CONFIG(see note 1)
5	GND	15	I/O
6	In	16	GND
7	In	17	I/O
8	GND	18	Out
9	In	19	RTN
10	In	20	Power Out(see note 2)

NOTES:

*Material

Body: LCP, UL 94V-0 Rated; Color: Black.
Shield: Brass.
Plating: Nickle Plating .
Contact: Brass.
Plating: Tin Plating On Solder Tail.
Gold Plating Over Nickel on Contact Area;

*Electrical Specification

Operation Voltage: 40 VAC max.
Current Rating: 0.5 Ampere per contact
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 100 Megohms min.
Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature: -20°C to +85°C

*How To Order

Series NO. WDPE-20 F 6 L 1 B U 3
Number of Contacts 3
Gold A:Flash Blank:No Mark
D:15u" F:30u"
6: DIP Type(Three Row) B:Brass
L: LCP 1:Black

REV				Wellco T&C Co., Ltd.			
Units	mm	Scale	1:1	Drawing By	Data	Date	Title
Tolerance Unless Otherwise Specified				Reviewed By	Data	Sheet 1 of 1	
.X	~	±0.38		Approval By	Data	Third Angle Projection	
.XX	~	±0.25					DisplayPort External DIP Type Male Three Row Connector
.XXX	~	±0.20					
Angle	~	± 3°					
				Drawing No.		REV	