


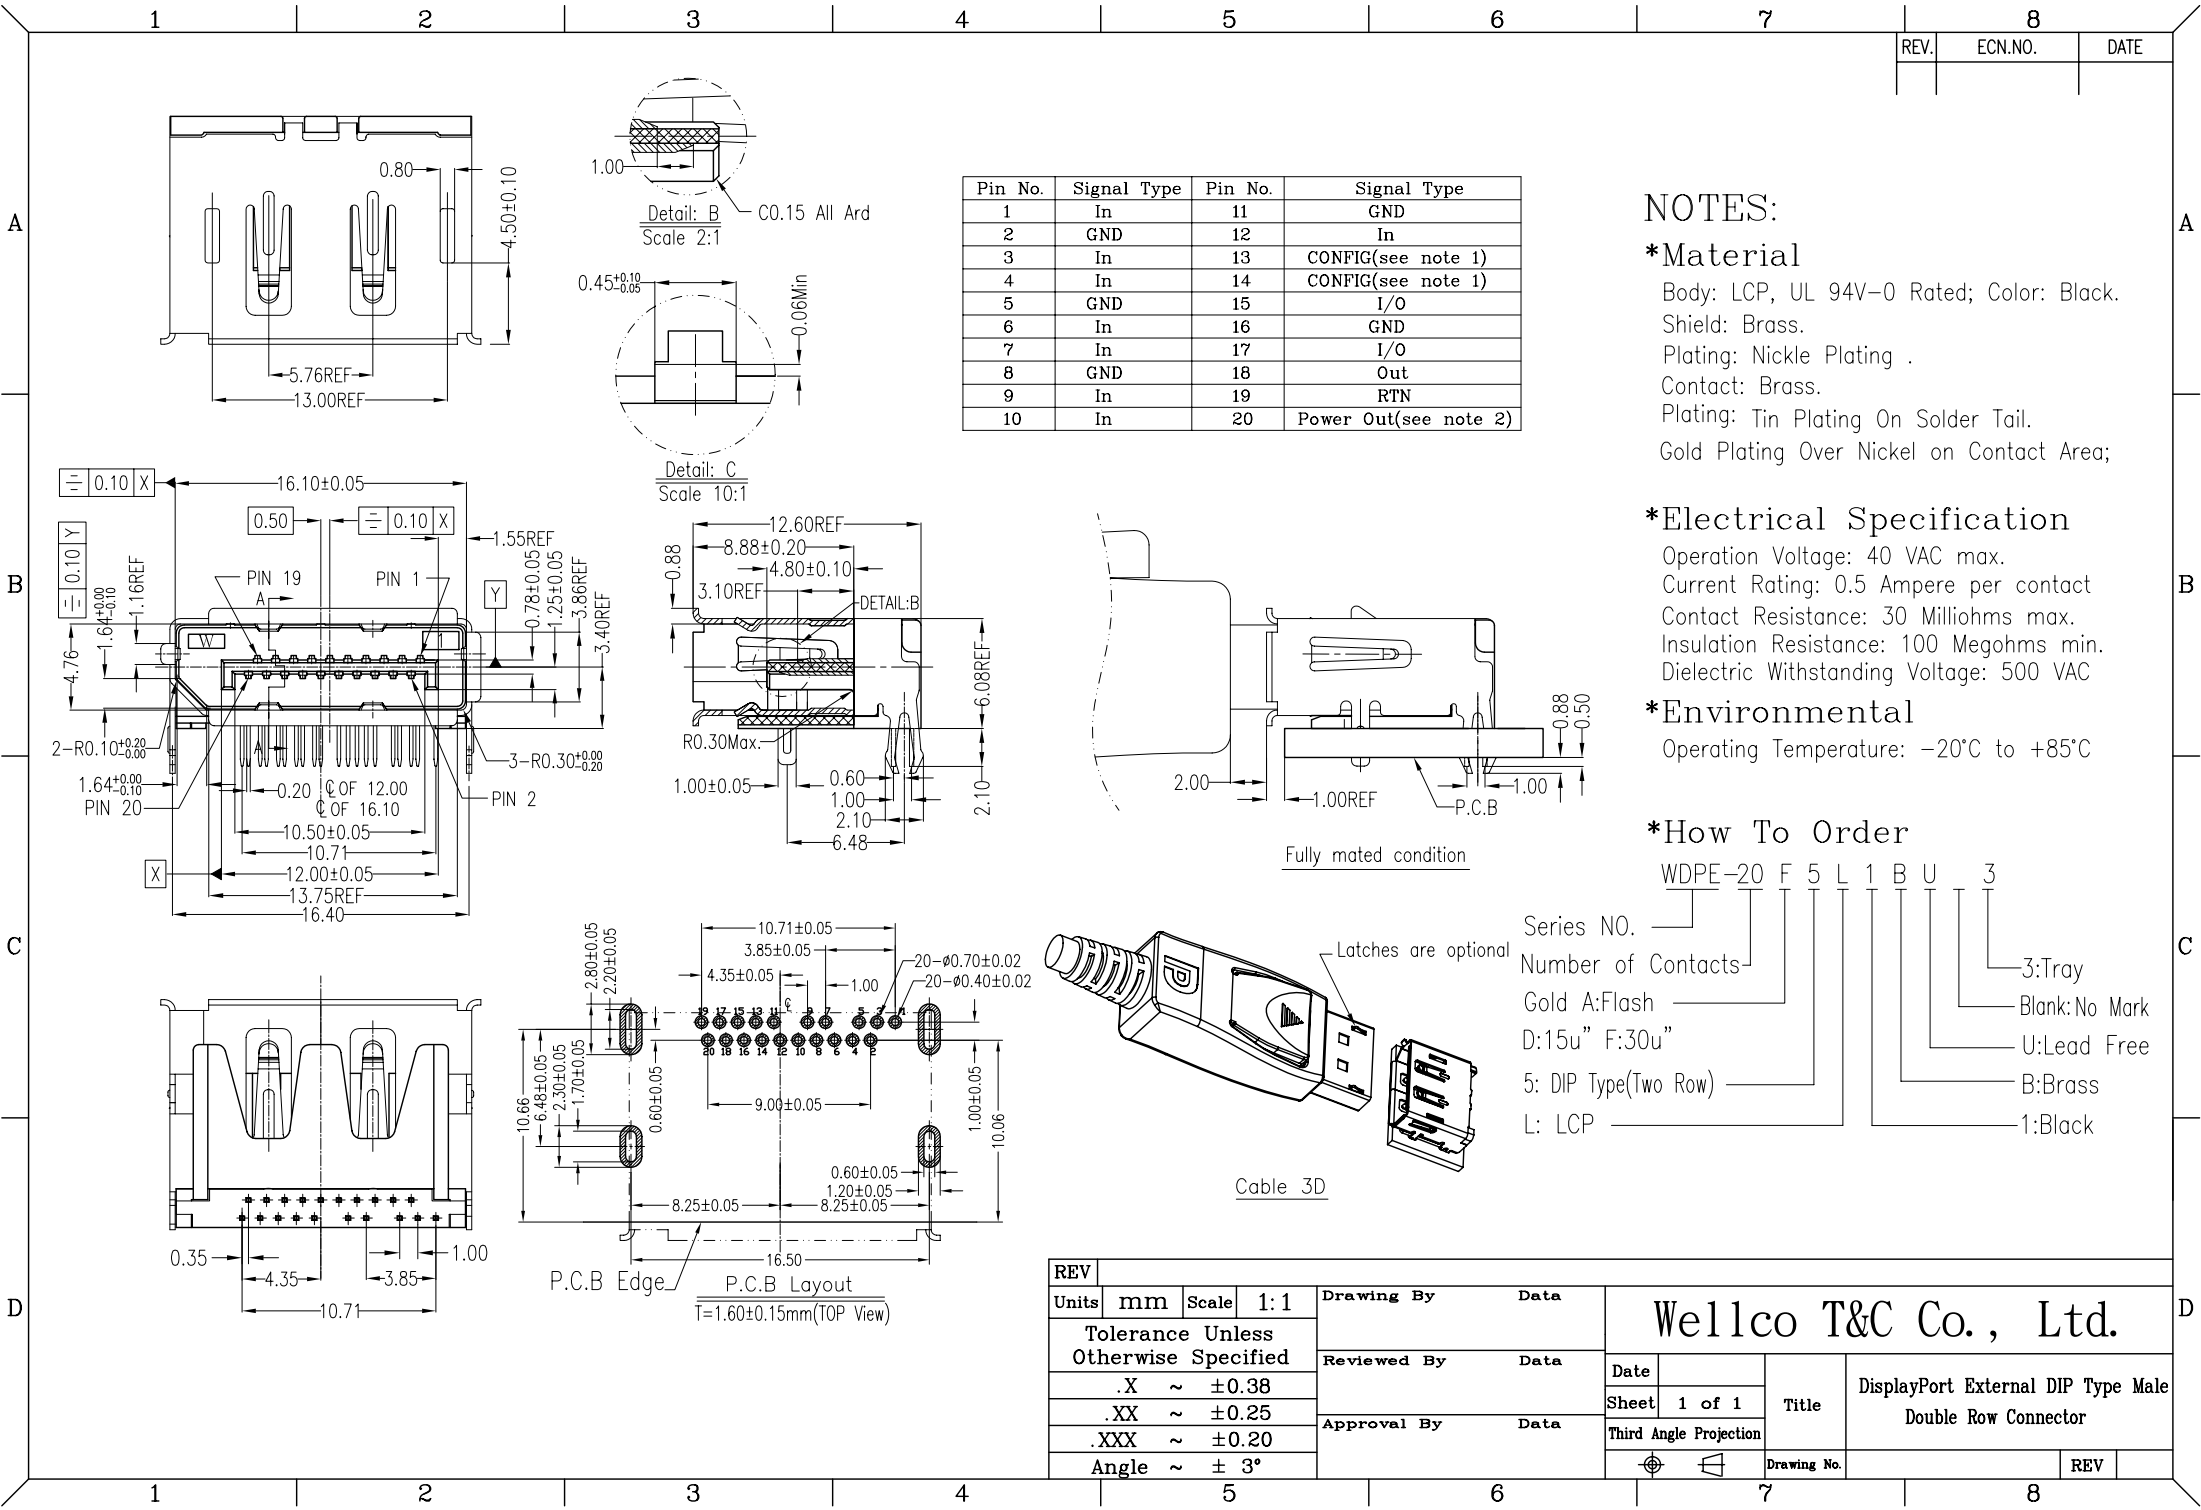

Pin No.	Signal Type	Pin No.	Signal Type
1	In	11	GND
2	GND	12	In
3	In	13	CONFIG(see note 1)
4	In	14	CONFIG(see note 1)
5	GND	15	I/O
6	In	16	GND
7	In	17	I/O
8	GND	18	Out
9	In	19	RTN
10	In	20	Power Out(see note 2)

NOTES:

*Material

Body: LCP, UL 94V-0 Rated; Color: Black.
Shield: Brass.
Plating: Nickle Plating .
Contact: Brass.
Plating: Tin Plating On Solder Tail.
Gold Plating Over Nickel on Contact Area;

*Electrical Specification


Operation Voltage: 40 VAC max.
Current Rating: 0.5 Ampere per contact
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 100 Megohms min.
Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature: -20°C to +85°C

*How To Order

Series NO. WDPE-20 F 5 L 1 B U 3
Number of Contacts 3:Tray
Gold A:Flash Blank:No Mark
D:15u" F:30u" U:Lead Free
5: DIP Type(Two Row) B:Brass
L: LCP 1:Black

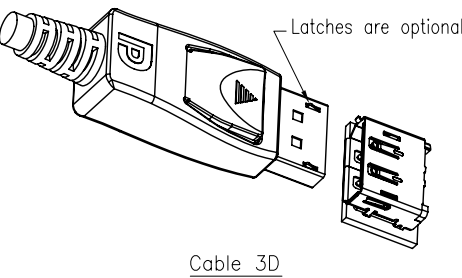

REV		Units		Scale		Drawing By		Data		Wellco T&C Co., Ltd.	
Tolerance Unless Otherwise Specified		.X		~ ±0.38		Reviewed By		Data		Date	
.XX		~ ±0.25		.XXX		~ ±0.20		Angle		~ ± 3°	
Approval By		Data		Third Angle Projection		Drawing No.		REV		DisplayPort External DIP Type Male Double Row Connector	