


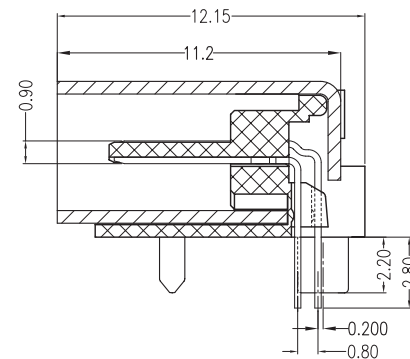
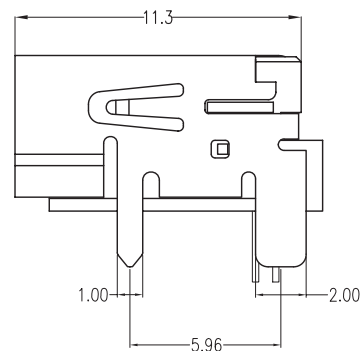
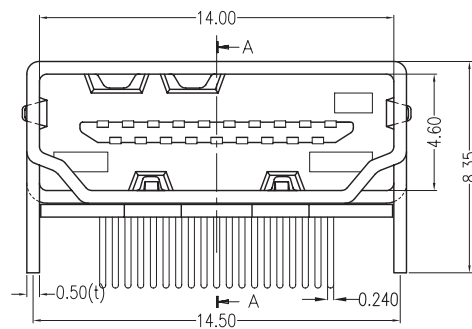


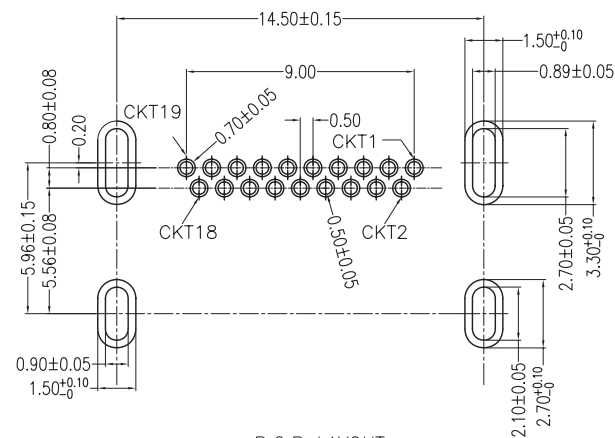

SECT:A-A

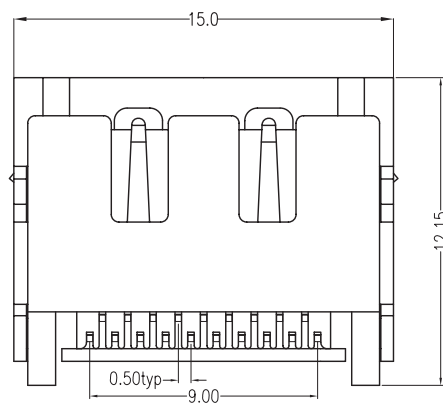

P.C.B LAYOUT

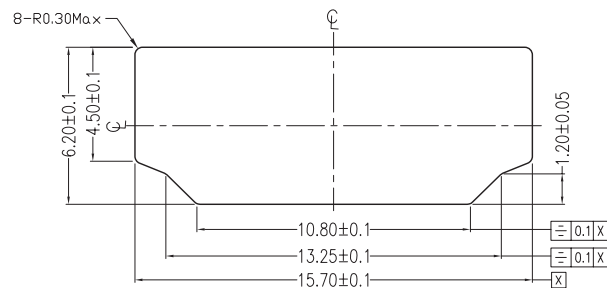

Reference Panel Cut Out Dimension

NOTES:

*Material

Body: LCP, UL 94V-0 Rated; Color: Black.

Shield: Brass.

Plating: Nickle Plating .

Contact: Brass.

Plating: Gold Plating Over Nickel on Contact Area;
Tin Plating On Solder Tail.

*Electrical Specification

Operation Voltage: 40 VAC max.

Current Rating: 0.5 Ampere per contact

Contact Resistance: 30 Milliohms max.

Insulation Resistance: 2000 Megohms min.

Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature: -20°C to $+85^{\circ}\text{C}$

*How To Order

Series NO. _____

Number of Contacts _____

Gold A:Flash B:5u" _____

C:10u" D:15u" F:30u" _____

1:DIP _____

L: LCP _____

1:Black _____

WHDM 19 D 1 L 1 B N 5 U 4 W

Blank:No Mark
C:CRE

4:Ni 5:Pure Dim Tin

U:Lead Free

3:Tray 5:Reel

N:No Flange

B:Brass
P:Phosphor Bronze

REV													
Units	mm	Scale	1:1	Drawing By		Data		Wellco T&C Co., Ltd.					
Tolerance Unless Otherwise Specified				Reviewed By		Data				Date			
				Approval By		Data				Sheet	1 of 1	Title	High Definition Media Interface 19PIN(Shield)DIP Type(No Flange)
										Third Angle Projection			
													
Angle ~ ± 3°													
5				6		7		8					