
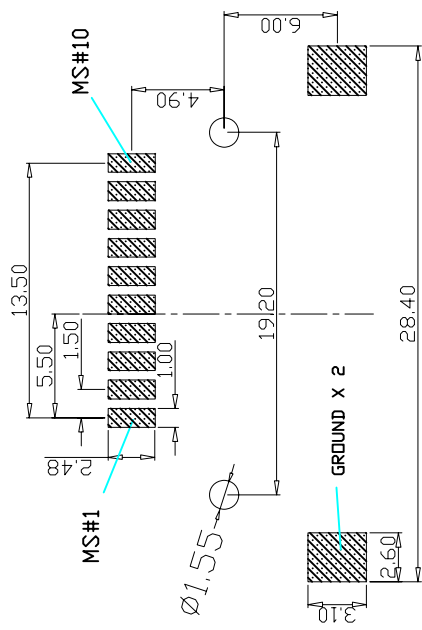


ROHS

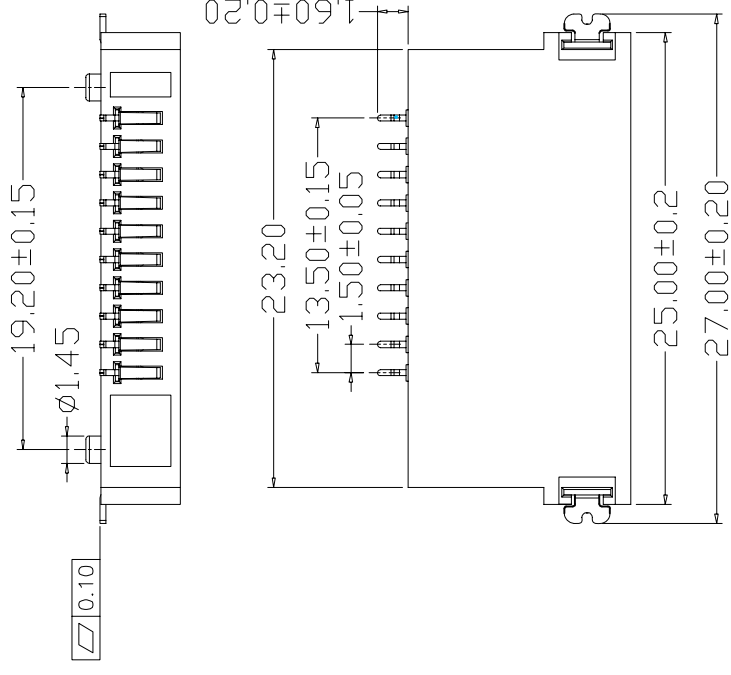

Recommended P.C.B Layout(Top Side)

NOTES:

- Current Rating: 0.5A AC,DC
- Temperature Range: -20°C~+60°C
- Contact Resistance: 40mΩ max
- Insulation Resistance: 1000MΩ min
- Withstanding Voltage: 500V AC/minute
- Material: LCP UL 94V-0

Pin Assignment	
MS#1	VSS
MS#2	BS
MS#3	DATA1
MS#4	SDIO/DATA0
MS#5	DATA2
MS#6	INS
MS#7	DATA3
MS#8	SCLK
MS#9	VCC
MS#10	VSS

REV.		REVISION/NOTE	DATE	TOLERANCE	Part No: 402003		
A	NEW	2009.4.3	X. ±4°	Wellco T&C Co., Ltd.			
B	修正/CLIP	2011.11.5	X.X ±0.38 X.X* ±2°	ARTICLE: MS10P 卡座			
DRAWN		LAN	X.XX ±0.25	MODEL QH-401006			
DES'D		LAN	X.XXX ±0.15	REVISION: B			
CHK'D		WANG	PROJECTION	UNIT: mm			
APPV'D		Hans Xia	SCALE: 1:1	SHEET: 1/1			

P/N # 402003