REV.	DATE	INSTRUCTION
1.2	2007/06/10	Modify Instruction

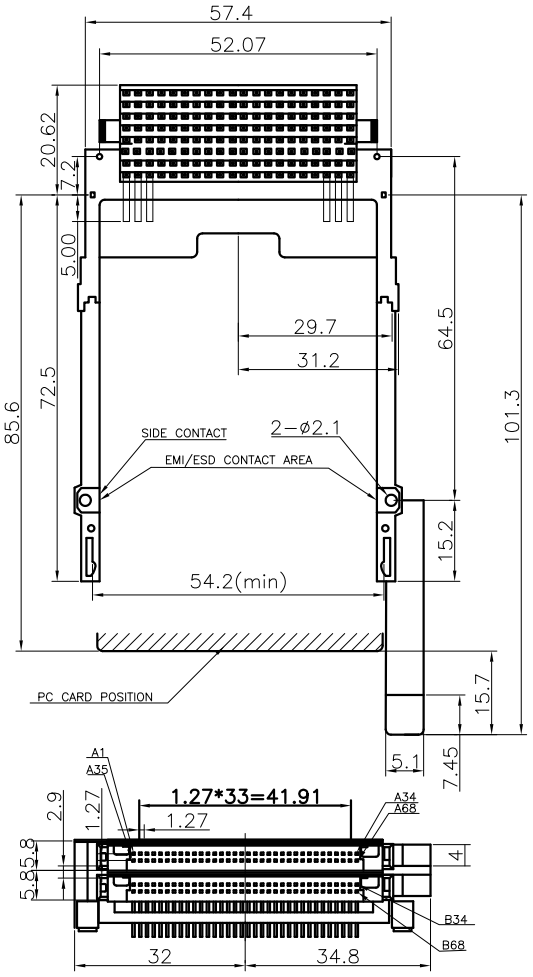

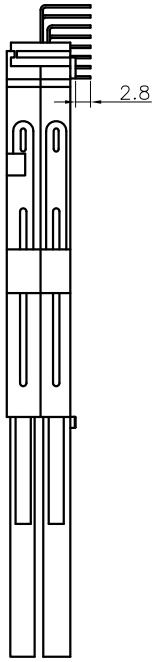

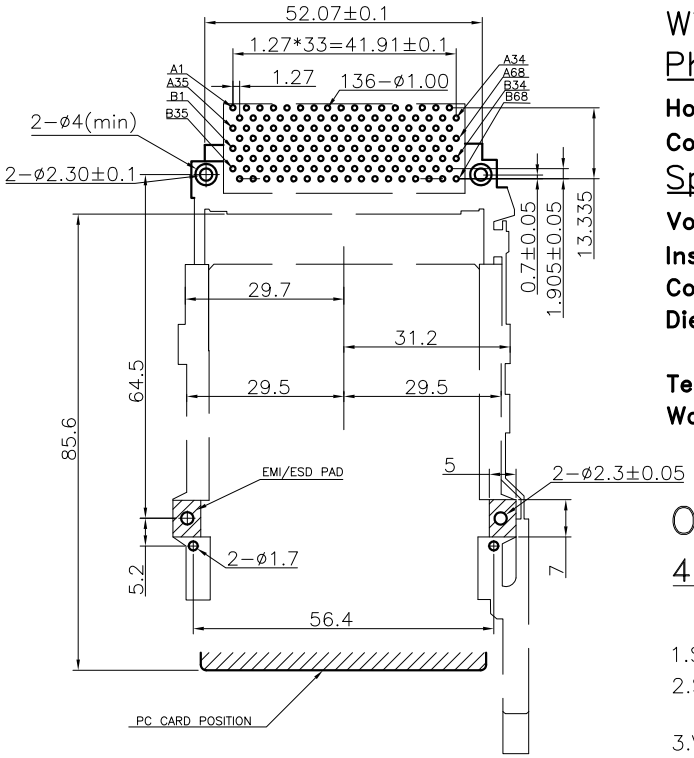

[43011300] SERIES

Pcmcia,Double Deck ,Dip,
With Guide,With Ejector Bar.

Physical:

Housing: PBT, UL 94V-0
Contact: Copper Alloy

Specifications:

Voltage Current Rating: 0.5A. 200V AC
Insulation Resistance: 1000M ohm min
Contact Resistance: 20m ohm max
Dielectric Withstanding Voltage:
AC 500V For 1 Minute
Temperature Rating: -20°C To +60°C
Wave Soldering temperature:
Lead Part: 245±5°C,5sec
RoHS Part: 260±5°C,5sec

ORDERING CODE

43011300	00	00	01	-1	LF
1	2	3	4	5	6

1.SERIES NO.
2.STAND OFF
00=NON STASND OFF
3.VOLTAGE
00=3.3V
4.PLATED
01=SELECTIVE GOLD FLASH
5.ECN CODE
6.PRODUCT'S STATUS
NON-SHOWED=STANDARD TYPE
LF=RoHS COMPLIANT

REV.	DATE	APPD.	CHR.	DR.	TOLERANCE UNLESS OTHERWISE SPECIFIED	
1.0	2007/04/27	DENNIS	MICHAEL	LILY	LINEAR	0.0±0.30
1.1	2007/06/07	MICHAEL	DANIEL	HERO		0.00±0.20
1.2	2007/06/10	MICHAEL	DANIEL	HERO	ANGLES	±3

CUSTOMER COPY

UNIT:mm

SIZE: A4

Wellco T&C Co., Ltd.

TITLE	PCMCIA CARD	
DWG NO.	43011300XXXXXX-1	
SCALE	1:1	SHEET 1 OF 1