
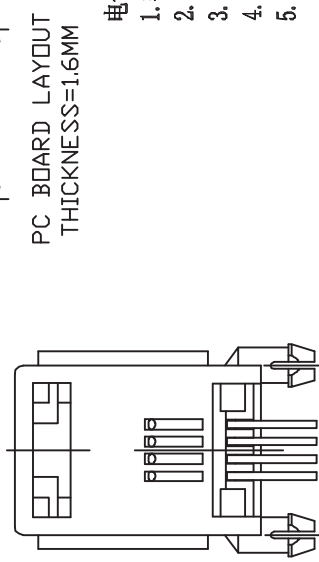
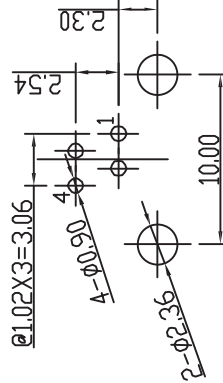


A	B	C	D	E	F	G	H
1	2	3	4	5	6	7	8

Optional : with or without Flange.

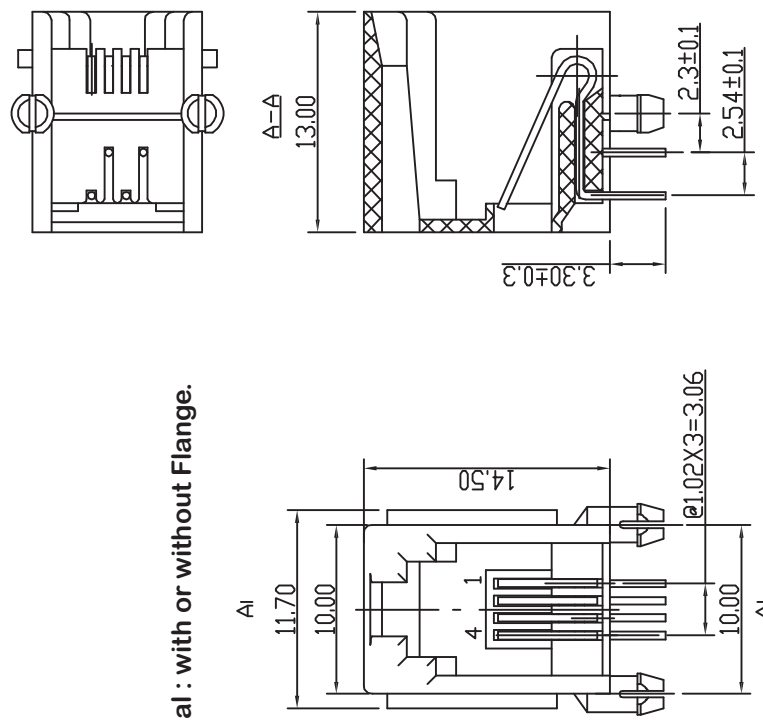

**NOTES:**

**ELECTRICAL:**

- 1. VOLTAGE RATING : 125 VAC RMS.
- 2. CURRENT RATING : 1.5 AMP.
- 3. CONTACT RESISTANCE : 35 MILLIOHMS MAX.
- 4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC.
- 5. DIELECTRIC STRENGTH : 1000 VAC RMS 60Hz, 1MIN.

**MECHANICAL:**

- 1. HOUSING&INSERT& MATERIAL : PBT UL94V-0.
- 2. CONTACT MATERIAL : PHOSPHOR BRONZE  $\phi$ 0.46mm.
- 3. PLATING : GOLD PLATING OVER NICKEL.
- 4. OPERATING LIFE : 750 CYCLES MIN.

**ENVIRONMENTAL:**

- 1. STORAGE : -40°C TO +85°C.
- 2. OPERATION: 0°C TO +70°C.

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.  
ROHS PART NUMBER:

**电气特性:**

- 1. 额定电压: 125 VAC RMS
- 2. 额定电流: 1.5 AMP
- 3. 接触电阻: 35  $\Omega$  MAX.
- 4. 绝缘电阻: 1000 M MIN. @500 VDC
- 5. 耐压强度: 1000 VAC RMS 60Hz, 1分钟

**机构特性:**

- 1. 塑壳材质: PBT, UL94V-0;
- 2. 圆针材质: 磷青铜,  $\phi$ 0.46mm;
- 3. 圆针电镀: 镍底, 表面全部镀金;
- 4. 可靠性: 最少750次插拔.

**环境特性:**

- 1. 储存温度: -40° ~+85°
- 2. 工作温度: 0° ~+70°

序号	料号	品名规格
1	1055-204002	55 4P4C全塑有耳 黑色
2	1055-204001	55 4P4C全塑有耳 3C冷灰

公差: TOLERANCES (CINCD)

MM	ASSEMBLY	W	0.38
		W	0.25
		W	0.15
		W	0.075
		W	0.038

角度 (ANGLES)  $\pm 1.5^\circ$

第三角视图

比例: 1:1 (SCALE)

材料: SEE NOTES (Material)

审核: (Checked)

批准: (Approved)

绘图: 丁敏2013/01.21 (Designed)

**Wellco T&C Co., Ltd.**

系列 (SERIES): 55

名称 (NAME): 55 4P4C全塑有耳

图号 (DWG NO.): N/A

料号 (PART NO.): SEE TABLE

单位 (UNIT): MM

版本 (REV.): A0

第 (OF) 1 页 共 (SHEET) 1 页

55 4P4C全塑有耳