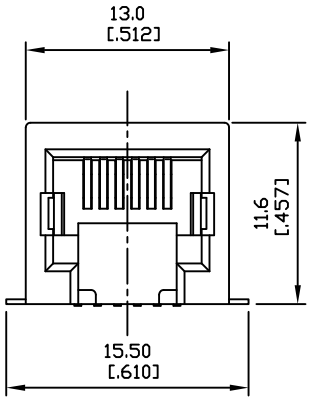



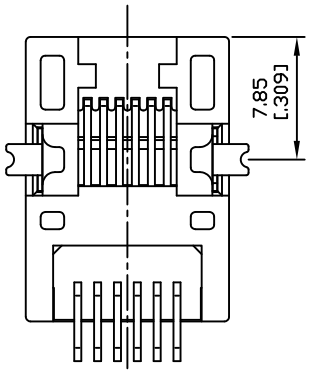

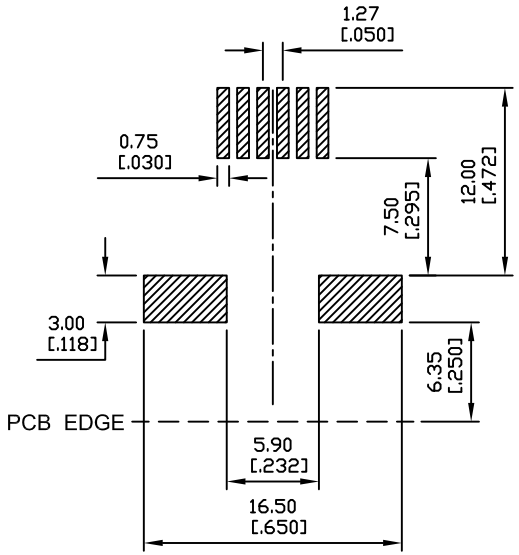

SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :

- Insulation Resistance : 500MΩ Min.
- Contact Resistance : 50mΩ Max.
- Withstand Voltage : 500 VAC 1 minute.
- Current Rating : 1.5A

Material:

- Housing: Nylon With Glass Fiber, UL 94V-0
- Contact : Selective Gold Plating
- Terminal: 0.35mm Thickness Phosphor Bronze Plated With Gold And Tin In Solder Area.
- Plank: Brass , Nickel Plating

CUL File No : E215573

PART NO : 8 5 6 6 A - B ∗ 1

- Positions
- Contacts
- Housing Color B : Black
- Ports
- Gold Plated
  - 0 :3u"±1u"
  - 1 : 6u"±1u"
  - 2 : 15u"± 5%
  - 3 : 30u"± 5%
  - 4 : 50u"± 5%

ZONE	REV.	DESCRIPTION	DATE	APPD.
Ⓐ				
Ⓑ				
Ⓒ				
Ⓓ				
Ⓔ				

FILE NO : 85 (SERIES)

TOLERANCE(公差) :
0.000 mm ± 0.075mm
0.00 mm ± 0.15mm
0.0 mm ± 0.25mm

Wellco T&C Co., Ltd.

TITLE 圖 名	RJ11 SMT SIDE ENTRY PCB JACK			UNIT 單位	mm inch
DWG NO. 圖 號	8566A-B ∗ 1			SCALE 比 例	1 : 1
REV. 版本	A.0	DATE 日 期	2007-01-29		
CHECKED BY 審 核	Aaron		DRAWN BY 製 圖	Michael	