

SUGGESTED PCB LAYOUT
TOP VIEW


Electrical Characteristics :

- Insulation Resistance : 500M Ω Min.
- Contact Resistance : 30m Ω Max.
- Withstand Voltage : 500 VAC 1 minute.
- Current Rating : 1.5A

Material:

Housing : Thermoplastic , UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 CUL File No : E215573

PART NO : 8 2 6 6 - B * 1

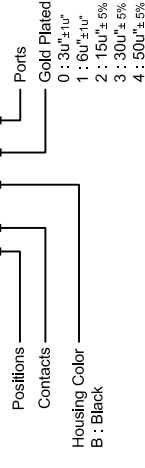

Wellco T&C Co., Ltd.

TITLE 圖名	NON-SHIELDED 6P6C SIDE ENTRY PCB JACK	UNIT 單位	mm inch
PART NO. 料號	8266-B * 1	SCALE 比例	1:1
REV. 版本	A.0	DATE 日期	2007-01-29
CHECKED BY 審核	Nick	DRAWN BY 製圖	Aaron

FILE NO : 82(SERIES)

TOLERANCE(公差):
 0.000 mm ± 0.075 mm
 0.00 mm ± 0.15 mm
 0.0 mm ± 0.25 mm

ZONE	REV.	DESCRIPTION	DATE	APPD.
(A)				
(B)				
(C)				
(D)				
(E)				