

PCB EDGE

SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :


- Insulation Resistance : 500MΩ Min.
- Contact Resistance : 50mΩ Max.
- Withstand Voltage : 500 VAC 1 minute.
- Current Rating : 1.5A

Material:

Housing: Thermoplastic UL 94V-0
 Contact : Selective Gold Plating
 Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.

CUL File No : E215573

PART NO : 8 5 6 6 B - * * 1

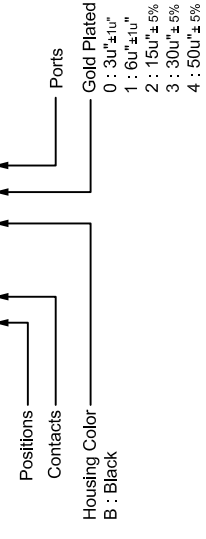

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)	TITLE 圖名	NON-SHIELDED SMT TYPE PCB JACK	UNIT 單位	mm inch
(A)					TOLERANCE(公差): 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	PART NO. 料號	8566B- * * 1	SCALE 比例	1 : 1
(B)						REV. 版本	A.0	DATE 日期	2007-08-21
(C)						CHECKED BY 審核	Michael	DRAWN BY 製圖	Michael
(D)									
(E)									

Wellco T&C Co., Ltd.