| REV. | ECN. NO. | NAME | DATA |
|---|---|---|---|
| A0 | NEW | 丁 敏 | 2012-10-16 |

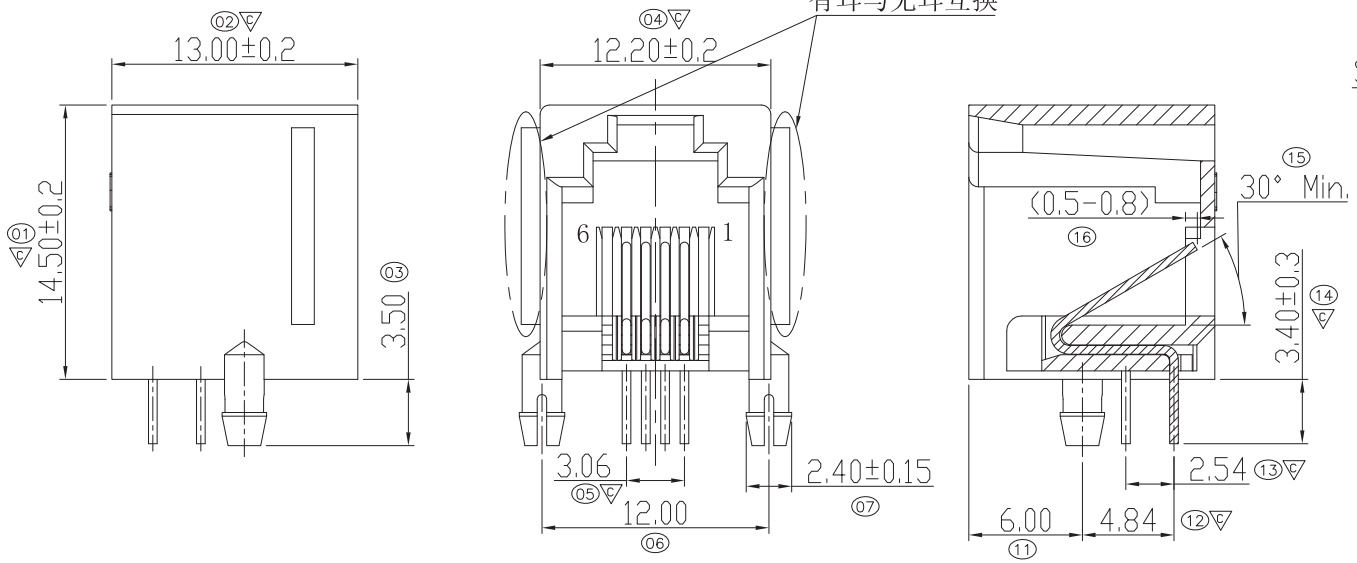


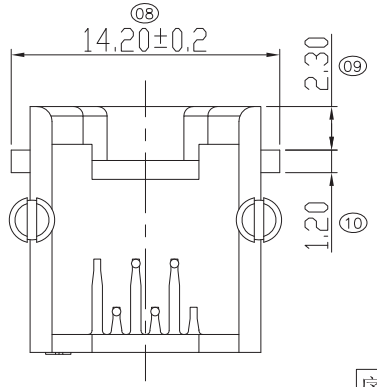


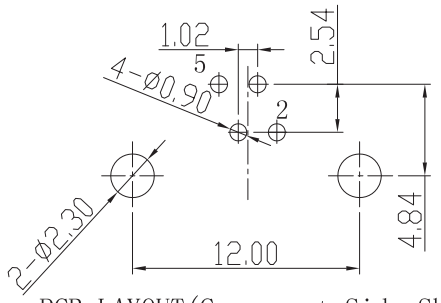


PCB LAYOUT(Component Side Shown)

TOLERANCES:±0.05

## SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 20mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩMIN. AT 500V DC.
5. DIELECTRIC STRENGTH: 1000 VAC 50Hz 1MINUTE

MECHANICAL:

1. HOUSING MATERIAL:THERMOPLASTIC, PBT+15%GF UL94V-0 RATED,COLOR GREY.
2. CONTACT MATERIAL:DIA. PHOSPHOR BRONZE (C5210-H)ø=0.46MM
3. PLATING:GOLD PLATING OVER NICKEL, PLATED NICKEL 30U MIN. GOLD PLATED ON CONTENT AREA G/F
4. OPERATING LIFE:750 CYCLES MIN.
5. PCB RETENTION PRE-SOLDER: 1 LB MIN.

ENVIRONMENTAL:

1. STORAGE:-40°C TO +85°C
2. OPERATION: -40°C TO +70°C

标有"⊛"为FAI尺寸,标有"▽"号为重点管控及首件检测尺寸.

| 序号 | 品名规格 | 料号 |
|---|---|---|
| 1 | RJ11 5521 6P4C全塑 无耳灰色 | N/A |

DETACHED LISTS

MM (INCH)

公 差: TOLERANCES

| MM | MM |
|---|---|
| .0 ± 0.20 | .0 ± 0.30 |
| .00 ± 0.15 | .00 ± 0.25 |
| .000 ± 0.075 | .000 ± 0.10 |

角度(ANGLES) ± 1.5°

第 三 角 视 图

绘 图: (Designed)

审 核: (Checked)

批 准: (Approved)

材 料: (Material) SEE NOTES

比 例: (SCALE) 1:1

**Wellco T&C Co., Ltd.**

| 系 列 (SERIES) | 名称(NAME) |
|---|---|
| RJ | RJ11 5521 6P 全塑 (有耳/无耳) |

图号(DWG NO.): N/A 版本 REV. A0

料号(PART NO): SEE TABLE

单位(UNIT): MM 共(SHEET) 1 页 第(OF) 1 页