


PIN ASSIGNMENT

DB9P Female:	1	2	3	4	5	6	7	8
RJ45 Female:	2	5	6	4	8	7		
	Grey	Green	Blue	Brown	Black	Yellow		

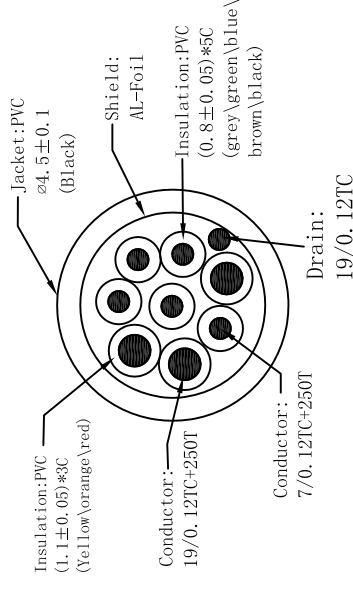

8										Wellco T&C Co., Ltd.		DB9P Female to RJ45 Female Net length:100mm	
7		THUMBSCREW 2.3*46mm Nickel Plated		2		PCS		DRAW:		徐翩翩		TITLE	
6		35P PVC White Mould		4		g		TOLERANCE UNLESS SPECIFIED				PART NO.	
5		45P PVC White Mould		25		g		UP TO 5				WC0625-100	
4		PE Inner Mould		5		g		ABOVE 5 --30				DRAW NO.	
3		RJ45 Female Nickel Plated		1		PCS		ABOVE 30--50				SCALE	
2		DB9P Female Nickel Plated		1		PCS		ABOVE 50		2015.6.25		NTS	
1		Cable: (7/0.12TC+250T)*5C+(19/0.12TC+250T)*3C+19/0.12TC+AL OD:4.5±0.1mm COLOR:black L=100 mm 26 or 28 AWG		1		PCS		ANGLE				UNIT	
NO		Description		Q'TY		Unit		±3°		DATE		mm	