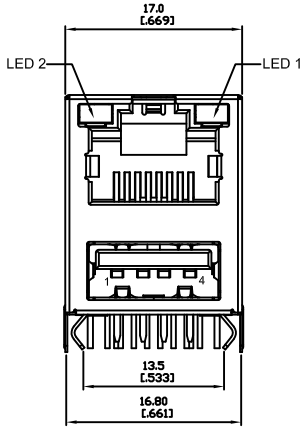

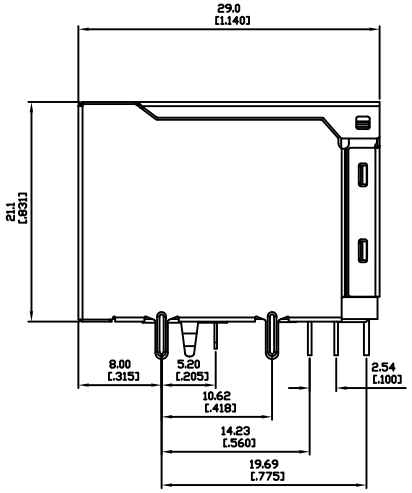

Electrical Characteristics :

- Insulation Resistance : 500MΩ Min.
- Contact Resistance : 50mΩ Max.
- Withstand Voltage : 500 VAC 1 minute.
- Current Rating : 1.5A

Material:
Housing: Thermoplastic UL 94V-0
Contact : Selective Gold Plating
Terminal: 0.35mm Thickness Phosphor Bronze
Plated With Gold And Tin In Solder Area.
Shielded: Brass ,Nickel Plating
Shielded Cover: Brass ,Nickel Plating

PART NO : S U A J - 1 8 0 0 - 0 ∗ ∗ -0 0 - B

- Contacts
- Panel Ground
  - 0 : Non-Panel Ground
  - U : Top With Panel Ground
  - D : 2 Side With Panel Ground
  - S : 3 Side With Panel Ground
- Led
- Gold Plated
- Housing Color
- PBT

部位 / 編號	M.J.	USB
0	Black	Black

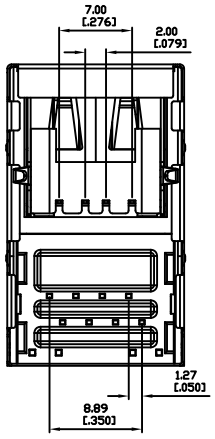

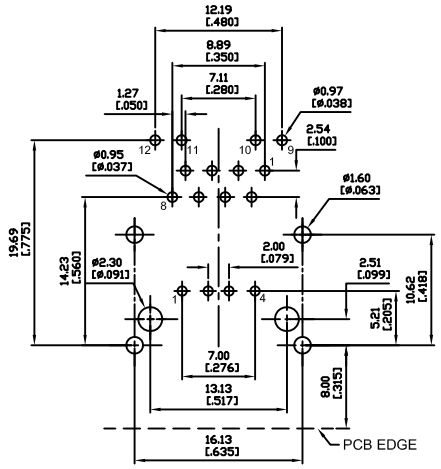

SUGGESTED PCB LAYOUT
TOP VIEW

Gold Plated

部位 / 編號	M.J.	USB
0	3u"±1u"	1.1 (3u"±1u")
1	6u"±1u"	
2	15u"± 5%	
3	30u"± 5%	
4	50u"± 5%	
5	3u"±1u"	2.0 (30u"± 5%)
6	6u"±1u"	
7	15u"± 5%	
8	30u"± 5%	
9	50u"± 5%	

LED Color Options Table

LED Color Options		LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	
No LED	No LED	0
Yellow	Green	1
No LED	Green	2
Yellow	No LED	3
Green	Yellow	4
Green	Green	5
Yellow	Yellow	6
Orange/Green	Orange/Green	7
Yellow/Green	Yellow/Green	8
Orange/Green	Yellow	9

Wellco T&C Co., Ltd.

ZONE	REV.	DESCRIPTION	DATE	APPD.
Ⓐ				
Ⓑ				
Ⓒ				
Ⓓ				
Ⓔ				

FILE NO : SUAJ-1800 (SERIES)

TOLERANCE (公差) :
0.000 mm ± 0.075mm
0.00 mm ± 0.15mm
0.0 mm ± 0.25mm

TITLE 圖 名	RJ45/USB Combo			UNIT 單位	mm inch
PART NO. 料 號	SUAJ-1800-0∗∗-00-B			SCALE 比 例	1 : 1
REV. 版本	A.0	DATE 日 期	2008-01-04		
CHECKED BY 審 核	Michael		DRAWN BY 製 圖	David	