
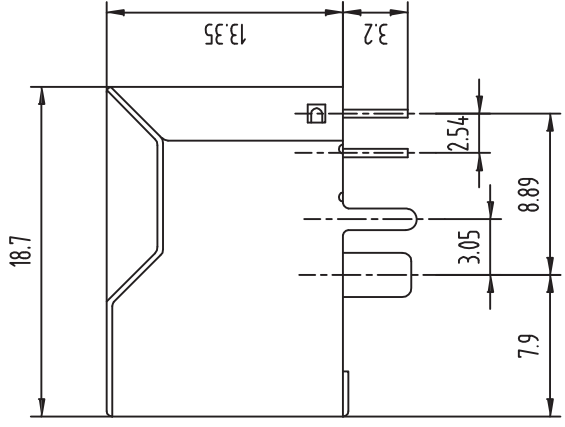


REV.	ECN. NO.	NAME	DATA
A0	NEW	MIN-D	2012-08-28

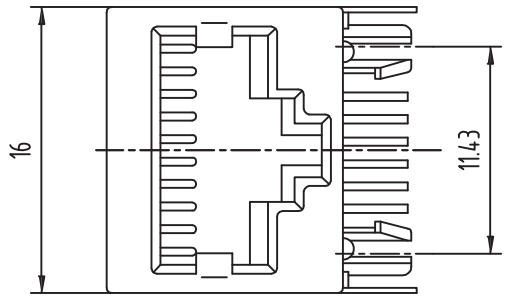

**NOTES:**

**ELECTRICAL:**



- VOLTAGE RATING : 125VAC RMS
- CURRENT RATING : 1.5 AMP
- CONTACT RESISTANCE : 50 MILLIOHMS MAX
- INSULATION RESISTANCE : 500 MEGOHMS MIN @500 VDC
- DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ.1MIN

**MECHANICAL:**

- HOUSING MATERIAL : GLASS FILLED POLTER(UL94V-0)
- CONTACT MATERIAL : PHOSPHOR BRONZE T=0.46MM
- PLATING : GOLD PLATION OVER NICKEL
- OPERATION LIFE : 750 CYCLES MIN
- PCB RETENTION PRE-SOLDER : 1 LBMIN
- PCB RETENTION POST-SOLDER:10 LBMIN

**ENVIRONMENTAL:**

- STORAGE : -40°C TO +85°C
  - Working temperature : -40°C ~ +125°C
  - WAVE SOLDER TEMPERATURE:230~250°C(5~10SECONDS)
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART68 SUBPART F

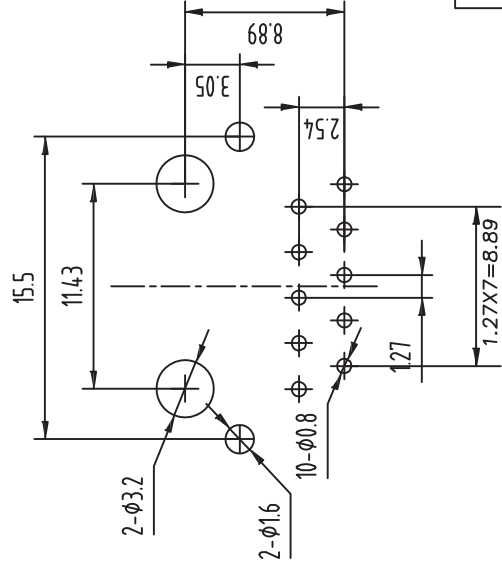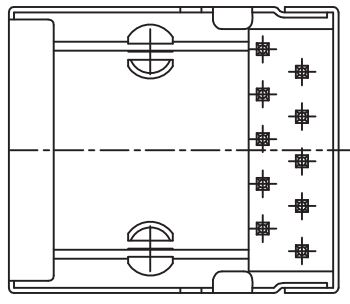

PCB LAYOUT

**PIN #XA56B2-00-134111 (10P10C)**



**Wellco T&C Co., Ltd.**

系列 (SERIES)

名称 (NAME)

图号 (DWG NO.): 56 10P10C 不开口全包无弹脚后3.05

料号 (PART NO.): 版本 A0

单位 (UNIT): MM 共 (SHEET) 1 页 第 (OF) 1 页

绘图: Billy July 10, 2011 (Designed)

审核: Long July 11, 2011 (Checked)

批准: Chin July 11, 2011 (Approved)

材料: SEE NOTES (Material)

比例: 1:1 (SCALE)

公差: TOLERANCES (UNITS)

MM	±0.38
.0	±0.25
.0	±0.15
.000	±0.15

角度 (ANGLES) ± 1.5°



第三角视图

DETACHED LISTS