

SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :


- Insulation Resistance : 500MΩ Min.
- Contact Resistance : 50mΩ Max.
- Withstand Voltage : 500 VAC 1 minute.
- Current Rating : 1.5A

Material:

- Housing: Nylon With Glass Fiber, UL 94V-0
- Contact : Selective Gold Plating
- Terminal: 0.35mm Thickness Phosphor Bronze Plated With Gold And Tin In Solder Area.
- Plank: Brass , Nickel Plating

CUL File No : E215573

PART NO : 8 5 8 A - B * 1

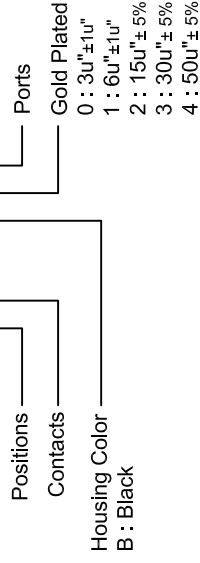

| ZONE | REV. | DESCRIPTION | DATE | APPD. |
|------|------|-------------|------|-------|
| (A) | | | | |
| (B) | | | | |
| (C) | | | | |
| (D) | | | | |
| (E) | | | | |

| |
|-----------------------|
| FILE NO : 85 (SERIES) |
| TOLERANCE(公差) : |
| 0.000 mm ± 0.075mm |
| 0.00 mm ± 0.15mm |
| 0.0 mm ± 0.25mm |

| TITLE 圖名 | RJ45 SMT SIDE ENTRY PCB JACK | UNIT 單位 | mm inch |
|------------------|------------------------------|----------------|------------|
| DWG NO. 圖號 | 8588A-B * 1 | SCALE 比例 | 1 : 1 |
| REV. 版本 | A.0 | DATE 日期 | 2007-01-30 |
| CHECKED BY 審核 | Aaron | DRAWN BY 製圖 | Michael |

Wellco T&C Co., Ltd.