


**Electrical Characteristics :**

- Insulation Resistance : 500MΩ Min.
- Contact Resistance : 50mΩ Max.
- Withstand Voltage : 500 VAC 1 minute.
- Current Rating : 1.5A

**Material:**

Housing: Thermoplastic UL 94V-0  
 Contact : Selective Gold Plating  
 Terminal: 0.35mm Thickness Phosphor Bronze  
 Plated With Gold And Tin In Solder Area.  
 Shielded: Brass ,Nickel Plating  
 CUL File No : E215573

**PART NO : 6 6 8 8 - B \* 11**

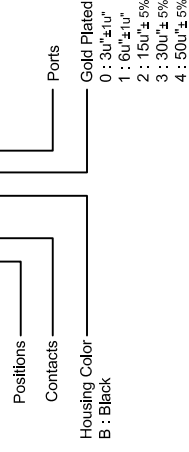

**SUGGESTED PCB LAYOUT**  
**TOP VIEW**

# Wellco T&C Co., Ltd.

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 66 (SERIES)	TITLE 圖名	SHIELDED RJ45 SIDE ENTRY PCB JACK	UNIT 單位	mm inch
(A)						PART NO. 料號	6688-B * 11	SCALE 比例	1 : 1
(B)						REV. 版本	A.0	DATE 日期	2007-03-08
(C)						CHECKED BY 審核	Michael	DRAWN BY 製圖	Valiant
(D)						TOLERANCE (公差) :			
(E)									

0.000 mm ± 0.075mm  
 0.00 mm ± 0.15mm  
 0.0 mm ± 0.25mm