


- Electrical Characteristics :**
- Insulation Resistance : 500MΩ Min.
 - Contact Resistance : 50mΩ Max.
 - Withstand Voltage : 500 VAC 1 minute.
 - Current Rating : 1.5A

Material:
 Housing: Thermoplastic UL 94V-0
 Contact : Selective Gold Plating
 Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.
 Shielded: Brass ,Nickel Plating
 CUL File No : E215573

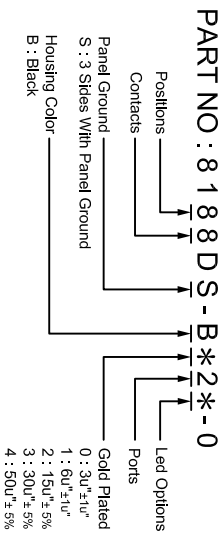

LED Color Options Table

LED Color Options	LED 1 (Right)	LED DASH OPTION
LED 2 (Left)	LED 1 (Right)	LED DASH OPTION
NO LED	NO LED	0
Yellow	Green	1
NO LED	Green	2
Yellow	NO LED	3
Green	Yellow	4
Yellow	Green	5
Orange/Green	Yellow	6
Yellow/Green	Orange/Green	7
Orange/Green	Yellow/Green	8
Orange/Green	Yellow	9
NO LED	Green/Yellow	Z
Green	Orange	A
Orange	Green	B
Green	Red	C
Red	Green	D

ZONE	REV.	DESCRIPTION	DATE	APPD.
(A)	A.1	原LED編號 Z: LED1: Yellow / Green 改為 Green / Yellow	2007-10-01	Aaron
(B)				
(C)				
(D)				
(E)				

FILE NO : 81 (SERIES)
 TOLERANCE (公差) :
 0.000 mm ± 0.075mm
 0.00 mm ± 0.15mm
 0.0 mm ± 0.25mm

Wellco T&C Co., Ltd.

TITLE	圖名	UNIT
SHIELDED RJ45 WITH LED PCB JACK		mm
PART NO.	8188DS-B * 2 * -0	inch
REV. 料號	A.1	SCALE 1:1
DATE 版本	2007-03-10	
CHECKED BY 審核	Michael	DRAWN BY 製圖
		Valiant

