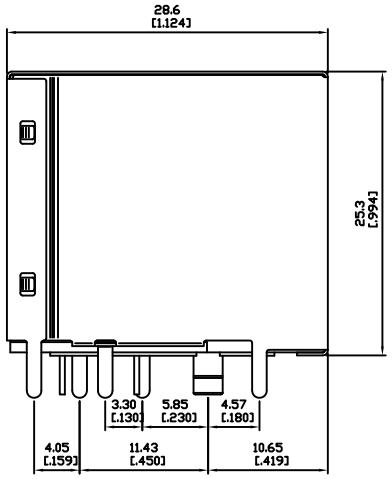


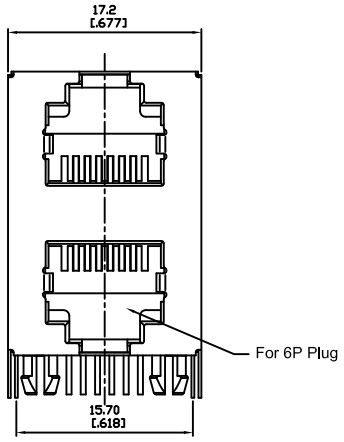


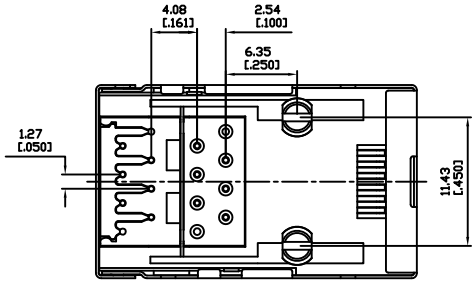


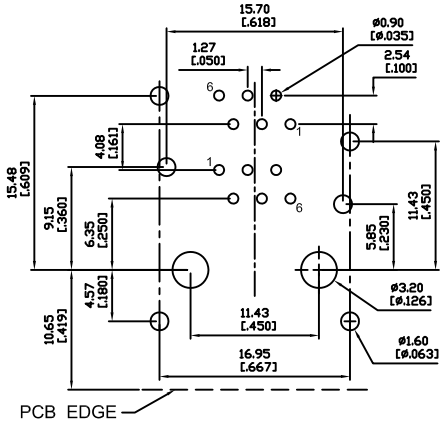


SUGGESTED PCB LAYOUT
TOP VIEW

Electrical Characteristics :

- Insulation Resistance : 500MΩ Min.
- Contact Resistance : 50mΩ Max.
- Withstand Voltage : 500 VAC 1 minute.
- Current Rating : 1.5A

Material:
Housing : Thermoplastic UL94V-0
Contact : Full Gold Plating
Spring Wire : Dia 0.45mm Phosphor Bronze
Optional Gold Plating Over Nickel
Shield : Brass, Nickel Plating.
CUL File No : E215573

PART NO : 8 2 8 6 - B ∗ 1 5 S - R

- Positions
- Contacts
- Housing Color: B : Black
- Ports: 1
- Gold Plated: 0 : 3u"±1u" / 1 : 6u"±1u" / 2 : 15u"± 5% / 3 : 30u"± 5% / 4 : 50u"± 5%
- For RJ11: S

| ZONE | REV. | DESCRIPTION | DATE | APPD. |
|---|---|---|---|---|
| Ⓐ | | | | |
| Ⓑ | | | | |
| Ⓒ | | | | |
| Ⓓ | | | | |
| Ⓔ | | | | |

FILE NO : 82 (SERIES)

TOLERANCE (公差) :
0.000 mm ± 0.075 mm
0.00 mm ± 0.15 mm
0.0 mm ± 0.25 mm

**Wellco T&C Co., Ltd.**

| | | | | | |
|---|---|---|---|---|---|
| TITLE 圖 名 | SHIELDED RJ11 SIDE ENTRY PCB JACK | | | UNIT 單位 | mm inch |
| PART NO. 料 號 | 8286-B∗15S-R | | | SCALE 比 例 | 1 : 1 |
| REV. 版本 | A.0 | DATE 日 期 | 2007-07-10 | | |
| CHECKED BY 審 核 | Michael | | DRAWN BY 製 圖 | Valiant | |