


PEG/TAB

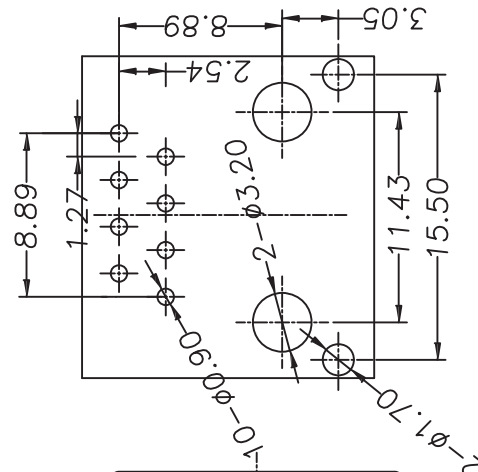

PC Board Layout

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125VAC RMS
- CURRENT RATING : 1.5 AMP
- CONTACT RESISTANCE : 50 MILLIOHMS MAX
- INSULATION RESISTANCE : 500 MEGOHMS MIN @500 VDC
- DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ.1MIN

MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLTER(UL94V-0)
- CONTACT MATERIAL : PHOSPHOR BRONZE T=0.46MM
- PLATING : GOLD PLATION OVER NICKEL
- OPERATION LIFE : 750 CYCLES MIN
- PCB RETENTION PRE-SOLDER : 1 LBMIN
- PCB RETENTION POST-SOLDER: 10 LBMIN

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C
 - OPERATION : 0°C TO +70°C
 - WAVE SOLDER TEMPERATURE: 230~250°C(5~10SECONDS)
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART68 SUBPART F

PART NUMBER:

PH56B2-XX-XXXXXX

56B SERIES

PCB JACK (56B系列PCB插口)

POSITIONS (接触脚):

- 4-4POSITIONS (4P), 6-6POSITIONS (6P)
- 8-8POSITIONS (8P), 0-10POSITIONS (10P)

CONTACTS (接触脚):

- 2-2CONTACTS (2C)
- 4-4CONTACTS (4C), 6-6CONTACTS (6C)
- 8-8CONTACTS (8C), 0-10CONTACTS (10C)

PORTS (插口):

- 1-1X1 (一插), 2-1X2 (二插)
- 4-1X4 (四插), 5-1X5 (五插)
- 6-1X6 (六插), 8-1X8 (八插)

SHIELD (屏蔽):

- 0-W/O SHIELD (无屏蔽)
- 1-HALF SHIELD (半屏蔽)
- 2-SHIELD W/EMI (EMI屏蔽)
- 3-SHIELD W/O EMI (无EMI屏蔽)

GOLD PLATING (镀金脚)

- 1-FU": 2-3U"
- 3-6U": 4-15U"
- 5-30U": 6-50U"

PLASTIC (塑料):

- 1-PBT, 2-NYLON66 (尼龙66)
- 3-NYLON46 (尼龙46), 4-ABS

PIN STYLE (插脚):

- 1-ROUND PIN (圆脚)
- 2-FLAT PIN (扁脚)

PEG/TAB (接触脚):

- 0-W/O PEG (无接触脚)
- 1-FRONT PEG (前接触脚)
- 2-FRONT PEG (前接触脚)
- 3-FRONT PEG (前接触脚)
- 4-BACK PEG (后接触脚)
- 5-BACK PEG (后接触脚)

REVISION RECORD

REV	ECO	DESCRIPTION	DRFT	CHKD
△		原始版本	MARRY 06.06.09	
△		增加料号, 更改图号	JACKY 07.02.05	
△		增加颜色信息	ZHOUXIONG 07.04.28	

Wellco T&C Co., Ltd.

设计 MARRY	日期 06.06.09	系列	名称
审核 JACKY	日期 06.06.09	56B2	PH56B2-08-131111
批准 ZHOUXIONG	日期 06.06.09	图号:	版本
材料:		1056-208004	A4 版本
数量:			
表面处理:			
比例: 1:1			

设计 MARRY	日期 06.06.09	系列	名称
审核 JACKY	日期 06.06.09	56B2	PH56B2-08-131111
批准 ZHOUXIONG	日期 06.06.09	图号:	版本
材料:		1056-208004	A4 版本
数量:			
表面处理:			
比例: 1:1			