
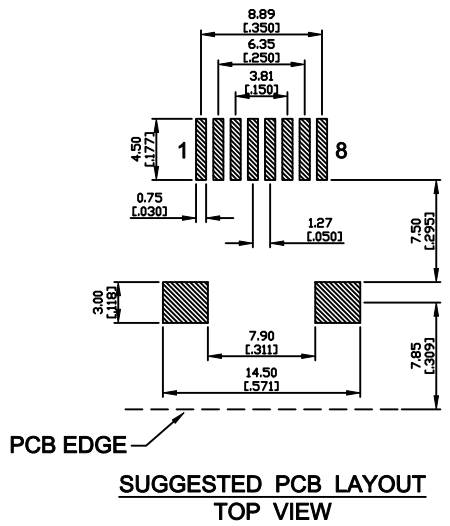
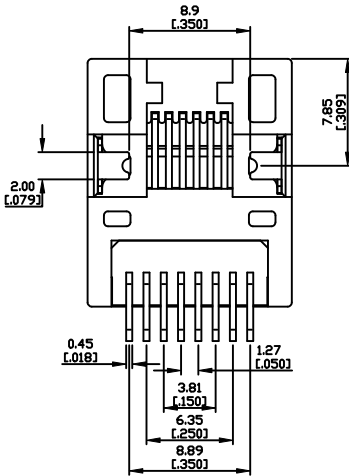
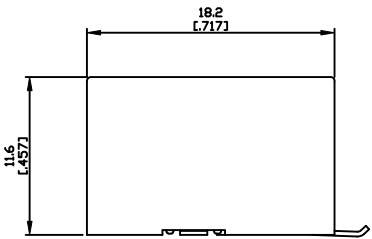


Electrical Characteristics :
 Insulation Resistance : 500MΩ Min.
 Contact Resistance : 50mΩ Max.
 Withstand Voltage : 1000 VAC 1 minute.
 Current Rating : 1.5A

Material:
 Housing: Thermoplastic UL 94V-0
 Contact : Selective Gold Plating
 Terminal: 0.35mm Thickness Phosphor Bronze
 Plated With Gold And Tin In Solder Area.
 CUL File No : E215573

PART NO : 8 5 8 8 B - B * 1

Positions	↑	↑	↑	↑	↑	Ports
Contacts	↑	↑	↑	↑	↑	
Housing Color	B : Black					Gold Plated
						0 : 6u"
						1 : 15u"
						2 : 30u"
						3 : 50u"
						4 : 50u"



Wellco T&C Co., Ltd.

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)	TITLE	NON-SHIELDED RJ45 SMT TYPE PCB JACK		UNIT	mm	
(A)	A.1	Withstand Voltage 500修改為1000VAC	2008-08-01	Nick	TOLERANCE(公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm	圖名			單位	inch	
(B)						PART NO.	8588B- * * 1		SCALE	1 : 1	
(C)						料號			比例		
(D)						REV.	A.1	DATE	2007-08-26		
(E)						版本					
						CHECKED BY	Michael		DRAWN BY	Michael	
						審核			製圖		