

NOTES:

ELECTRICAL:



- VOLTAGE RATING : 125VAC RMS
- CURRENT RATING : 1.5 AMP
- CONTACT RESISTANCE : 50 MILLIOHMS MAX
- INSULATION RESISTANCE : 500 MEGOHMS MIN @500 VDC
- DIELECTRIC STRENGTH : 1000 VAC RMS 50HZ. 1MIN

MECHANICAL:

- HOUSING MATERIAL : GLASS FILLED POLTER(UL94V-0)
- CONTACT MATERIAL : PHOSPHOR BRONZE T=0.46MM
- PLATING : GOLD PLATION OVER NICKEL
- OPERATION LIFE : 750 CYCLES MIN
- PCB RETENTION PRE-SOLDER : 1 LBMIN
- PCB RETENTION POST-SOLDER : 10 LBMIN

ENVIRONMENTAL:

- STORAGE : -40°C TO +85°C
 - OPERATION : 0°C TO +70°C
 - WAVE SOLDER TEMPERATURE: 230~250°C(5~10SECONDS)
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART68 SUBPART F

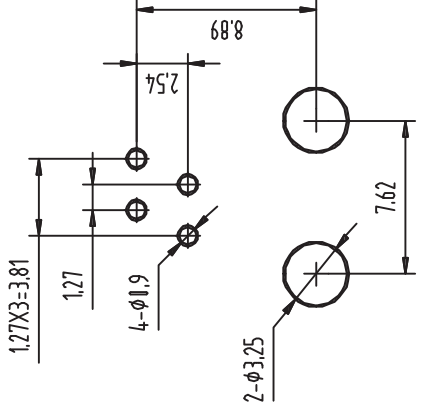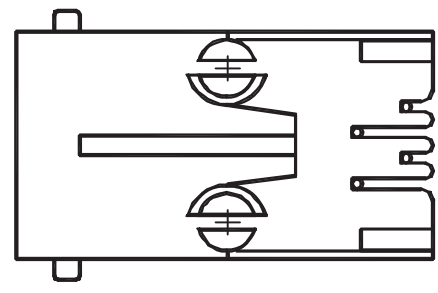

PCB LAYOUT

DETACHED LISTS			
圖號:	圖號(DWG NO.):	系列(SERIES):	名稱(NAME):
設計:	5721 4P4C	全鍍五耳插針	
校核:	圖號(PART NO.):		版本 REV A0
批准:	比例(SCALE):	1:1	頁數(SHEET) 1 頁數(OF) 1 頁

Wellco T&C Co., Ltd.