
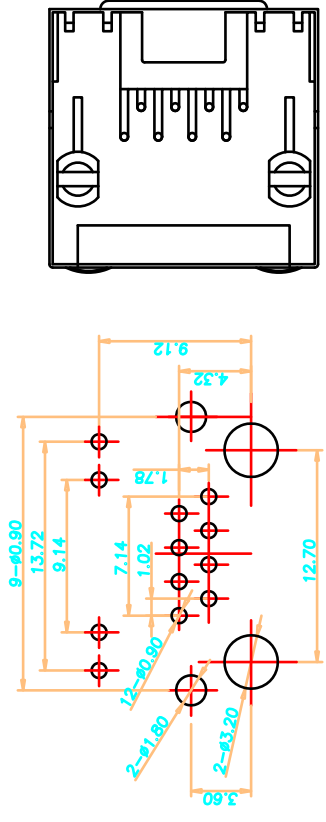


REVISION RECORD			
REV	ECO	DRFT	CHNO
△		MARRY	09.06.09
DESCRIPTION		原始版本	

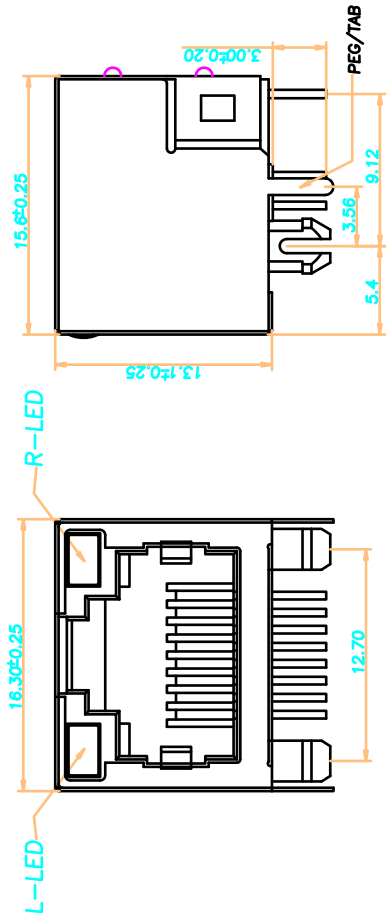

PC Board Layout

- NOTES:
- MATERIAL:
1. HOUSING MATERIAL: GLASS FILLED POLYESTER (UL94V-0).
 2. CONTACT MATERIAL: PHOSPHR BRONZE ϕ 0.46mm (C5100).
 3. PLATING: GOLD PLATING OVER NICKEL.
 4. SHIELD, COPPER ALLOY (OR STEEL ALLOY) 0.20mm THICKNESS PLATING NI.
 5. LED, OPTION.
- ELECTRICAL:
1. VOLTAGE RATING :125 VAC RMS.
 2. CURRENT RATING :1.5 AMP.
 3. CONTACT RESISTANCE:50 MILLIOHMS MAX.
 4. INSULATION RESISTANCE :500 MEGOHMS MIN @500V DC.
 5. DIELECTRIC WITHSTANDING
 6. LED RATINGS :1000V AC RMS 50Hz. 1MIN. RESISTANCE :FORWARD VOLTAGE:2.2 VOLTS TYPICAL. REVERSE VOLTAGE:5 VOLTS MAXIMUM.
- MECHANICAL:
1. DURRABILITY :750 CYCLES MIN.
 2. PCB RETENTION PRE-SOLDER:1 LB MIN.
- ENVIRONMENTAL:
1. STORAGE : -40° C TO +85C.
 2. OPERATION: 0C TO 70C.
- MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68, SUBPART F.

设计: MARRY		日期: 09.06.09	系列: JR-56-03		名称: 56+LED-03P-1L	
审核: XJFANG		日期: 09.06.09	图号: 1051-208001		版本: A4	
批准: BLBI		日期: 09.06.09	比例: 1:1		共 1 页 第 1 页	
材料:		数量:	表面处理:		A4 版本	
公差: ±0.30		公差: ±1.5°	比例: 1:1		A4 版本	
.XX ±0.25		第三角视图	比例: 1:1		A4 版本	
.XXX ±0.10		第三角视图	比例: 1:1		A4 版本	

Wellco T&C Co., Ltd.