

SUGGESTED PCB LAYOUT
TOP VIEW

- Electrical Characteristics :
- Insulation Resistance : 500MΩ Min.
 - Contact Resistance : 50mΩ Max.
 - Withstand Voltage : 500 VAC 1 minute.
 - Current Rating : 1.5A

Material:

Housing: Thermoplastic UL 94V-0


Contact : Selective Gold Plating

Terminal: 0.35mm Thickness Phosphor Bronze

Plated With Gold And Gold Flash In All Area.

CUL File No : E215573

PART NO : 5 0 6 6 - B * 1

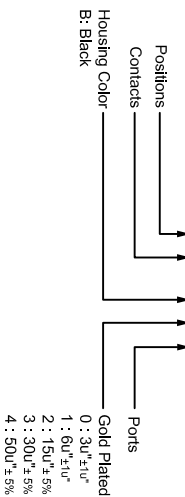

Wellco T&C Co., Ltd.

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO. : 50 (SERIES)
(A)					TOLERANCE(公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
(B)					
(C)					
(D)					
(E)					

TITLE	BT. 601A Connector	UNIT	mm
圖名	BT. 601A Connector	單位	mm
PART NO.	5066 - B * 1	SCALE	1 : 1
料號	5066 - B * 1	比例	1 : 1
REV.	A.0	DATE	2007-08-31
版本	A.0	日期	2007-08-31
CHECKED BY	Michael	DRAWN BY	Michael
審核	Michael	製圖	Michael

