

- Electrical Characteristics :**
- Insulation Resistance : 500MΩ Min.
 - Contact Resistance : 30mΩ Max.
 - Withstand Voltage : 500 VAC 1 minute.
 - Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0



Contact : Full Gold Plating

Spring Wire : Dia 0.45mm Phosphor Bronze

Optional Gold Plating Over Nickel

CUL File No : E215573

PART NO : 5 2 6 6 - B * * *

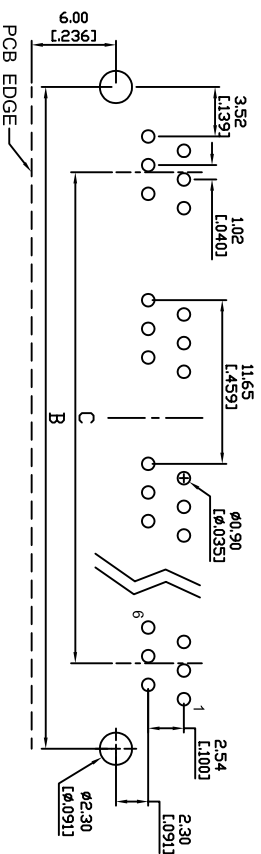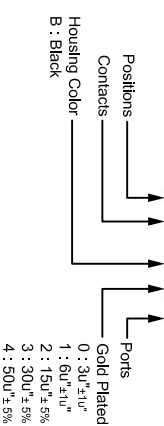

SUGGESTED PCB LAYOUT
TOP VIEW

ZONE	REV.	DESCRIPTION	DATE	APPD.
(A)				
(B)				
(C)				
(D)				
(E)				

FILE NO : 52 (SERIES)

TOLERANCE(公差) :

- 0.000 mm \pm 0.075 mm
- 0.00 mm \pm 0.15 mm
- 0.0 mm \pm 0.25 mm

Wellco T&C Co., Ltd.

Dimensions	No. Of Ports				
	4	5	6	7	8
A	49.10	60.75	72.40	84.05	95.70
B	47.10	58.75	70.40	82.05	93.70
C	34.95	46.60	58.25	69.90	81.55

TITLE	MULTI-PORTS RJ11	UNIT
圖名	SIDE ENTRY PCB JACK	單位
PART NO.	5266-B * *	mm
料號		inch
REV.	DATE	SCALE
版本	A.0 日期	比例
2007-03-29		1 : 1
CHECKED BY	DRAWN BY	
審核	Michael	製圖
		Valiant