


- Electrical Characteristics :**
- Insulation Resistance : 500MΩ Min.
  - Contact Resistance : 30mΩ Max.
  - Withstand Voltage : 500 VAC 1 minute.
  - Current Rating : 1.5A

**Material:**  
 Housing : Thermoplastic UL94V-0  
 Contact : Full Gold Plating  
 Spring Wire : Dia 0.45mm Phosphor Bronze  
 Optional Gold Plating Over Nickel  
 CUL File No : E215573

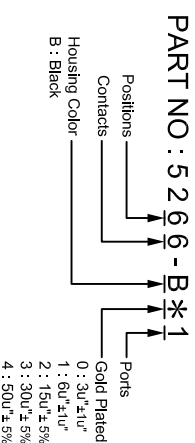

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 52 (SERIES)
(A)					<b>TOLERANCE(公差) :</b> 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
(B)					
(C)					
(D)					
(E)					

<b>Wellco T&amp;C Co., Ltd.</b>		TITLE	RJ11 6P6C	UNIT	mm
		圖名	SIDE ENTRY PCB JACK	單位	inch
審核 Michael		PART NO.	5266-B*1	SCALE	1:1
		料號		比例	
REV.	A.0	DATE	2007-01-22		
版本		日期			
CHECKED BY	Michael	DRAWN BY		Vallant	
審核		製圖			