


- Electrical Characteristics :**
- Insulation Resistance : 500M $\Omega$  Min.
  - Contact Resistance : 30m $\Omega$  Max.
  - Withstand Voltage : 500 VAC 1 minute.
  - Current Rating : 1.5A

**Material:**

- Housing : Thermoplastic UL94V-0
- Contact : Full Gold Plating
- Spring Wire : Dia 0.45mm Phosphor Bronze
- Optional Gold Plating Over Nickel
- Shield : Brass, Nickel Plating.

**PART NO : 5 2 8 8 - B \* 1 0**

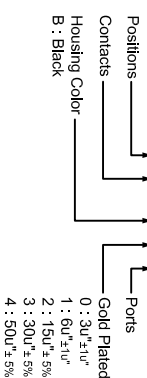

# Wellco T&C Co., Ltd.

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 52 (SERIES)
(A)	A.1	原2.20尺寸更正為2.30	2007-06-05	Aaron	TOLERANCE (公差) : 0.000 mm $\pm$ 0.075 mm 0.00 mm $\pm$ 0.15 mm 0.0 mm $\pm$ 0.25 mm
(B)					
(C)					
(D)					
(E)					

TITLE	SHIELDED RJ45	UNIT
圖名	SIDE ENTRY PCB JACK	單位
PART NO.	5288-B * 10	SCALE
料號		比例
REV.	A.1	DATE
版本	日期	2007-05-07
CHECKED BY	Michael	DRAWN BY
審核		製圖
		Vallant