

- Electrical Characteristics :**
- Insulation Resistance : 500MΩ Min.
  - Contact Resistance : 30mΩ Max.
  - Withstand Voltage : 500 VAC 1 minute.
  - Current Rating : 1.5A

**Material:**

Housing : Thermoplastic UL94V-0


Contact : Full Gold Plating

Spring Wire : Dia 0.45mm Phosphor Bronze

Optional Gold Plating Over Nickel

CUL File No : E215573

PART NO : 5 3 8 8 - B \* 1

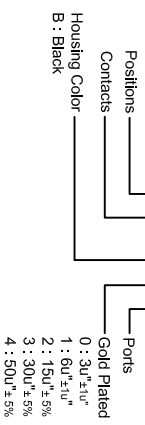

**Wellco T&C Co., Ltd.**

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 53 (SERIES)
(A)					<b>TOLERANCE(公差) :</b> 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
(B)					
(C)					
(D)					
(E)					

TITLE	UNIT
圖名	單位
RJ45 TOP ENTRY PCB JACK	mm
PART NO.	inch
料號	比例
5388-B*1	1:1
REV.	DATE
版本	日期
A.0	2007-05-08
CHECKED BY	DRAWN BY
審核	製圖
Michael	Vallant

