



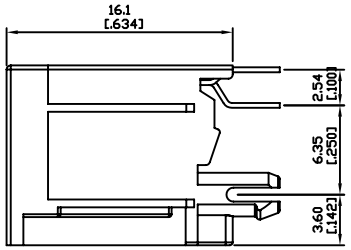



Electrical Characteristics :

- Insulation Resistance : 500MΩ Min.
- Contact Resistance : 50mΩ Max.
- Withstand Voltage : 500 VAC 1 minute.
- Current Rating : 1.5A

Material:

Housing: Thermoplastic UL 94V-0

Contact : Selective Gold Plating

Terminal: 0.35mm Thickness Phosphor Bronze Plated With Gold And Tin In Solder Area.

CUL File No : E215573

PART NO : 5 3 8 8 B - B ＊ 1

- Positions: 8
- Contacts: 8
- Housing Color: B : Black
- Ports: 1
- Gold Plated:
  - 0 : 3u"±1u"
  - 1 : 6u"±1u"
  - 2 : 15u"± 5%
  - 3 : 30u"± 5%
  - 4 : 50u"± 5%



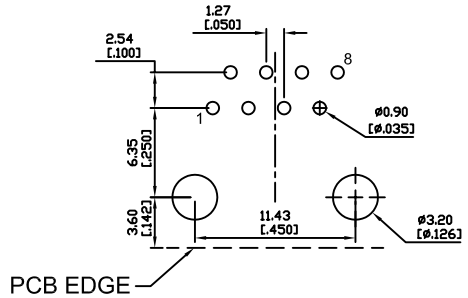

SUGGESTED PCBLAYOUT
TOP VIEW

ZONE	REV.	DESCRIPTION	DATE	APPD.
Ⓐ				
Ⓑ				
Ⓒ				
Ⓓ				
Ⓔ				

FILE NO : 53 (SERIES)

TOLERANCE(公差) :
0.000 mm ± 0.075 mm
0.00 mm ± 0.15 mm
0.0 mm ± 0.25 mm

Wellco T&C Co., Ltd.

TITLE 圖 名	RJ45 TOP ENTRY PCB JACK			UNIT 單位	mm inch
PART NO. 料 號	5388B-B＊1			SCALE 比 例	1 : 1
REV. 版本	A.0	DATE 日 期	2007-02-13		
CHECKED BY 審 核	Michael	DRAWN BY 製 圖	Valiant		