


SUGGESTED PCB LAYOUT
TOP VIEW

- Electrical Characteristics :**
- Insulation Resistance : 500M Ω Min.
 - Contact Resistance : 30m Ω Max.
 - Withstand Voltage : 500 VAC 1 minute.
 - Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 Shield : Brass, Nickel Plating.
 CUL File No : E215573

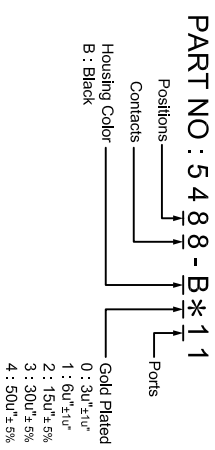

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 54 (SERIES)
(A)					
(B)					
(C)					
(D)					
(E)					

TOLERANCE (公差) :
 0.000 mm \pm 0.075 mm
 0.00 mm \pm 0.15 mm
 0.0 mm \pm 0.25 mm

Wellco T&C Co., Ltd.

TITLE	SHIELDED RJ45	UNIT
圖名	SIDE ENTRY PCB JACK	單位
PART NO.	5488-B * 11	SCALE
料號		比例
REV.	A.0	DATE
版本	日期	2007-02-06
CHECKED BY	Michael	DRAWN BY
審核		製圖
		Vallant