


- Electrical Characteristics :**
- Insulation Resistance : 500MΩ Min.
 - Contact Resistance : 30mΩ Max.
 - Withstand Voltage : 500 VAC 1 minute.
 - Current Rating : 1.5A

Material:
 Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 CUL File No : E215573

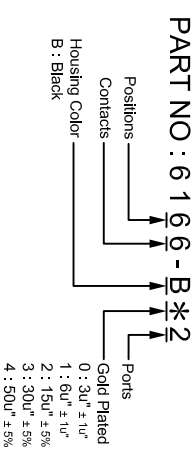

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 61 (SERIES)
(A)					TOLERANCE(公差) : 0.000 mm ± 0.075 mm 0.00 mm ± 0.15 mm 0.0 mm ± 0.25 mm
(B)					
(C)					
(D)					
(E)					

Wellco T&C Co., Ltd.

TITLE	DUAL PORTS RJ11	UNIT
圖名	6P6C SIDE ENTRY PCB JACK	單位
PART NO.	6166-B*2	mm
料號		inch
REV.	A.0	SCALE
版本	DATE	比例
	日期	1 : 1
CHECKED BY	Michael	DRAWN BY
審核		製圖
		Vallant