RoHS 2002/95/EC

MAK.	QUA.	Description	REV.	DRW.	惠
A					
B					

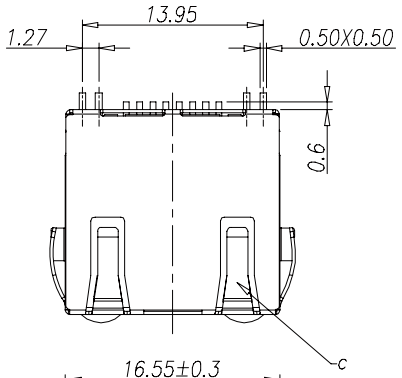

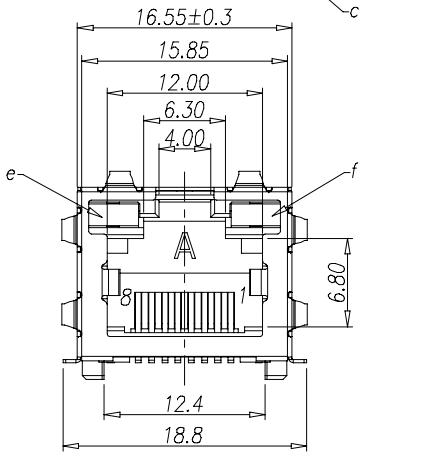

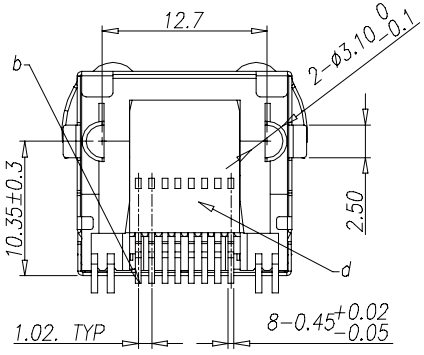



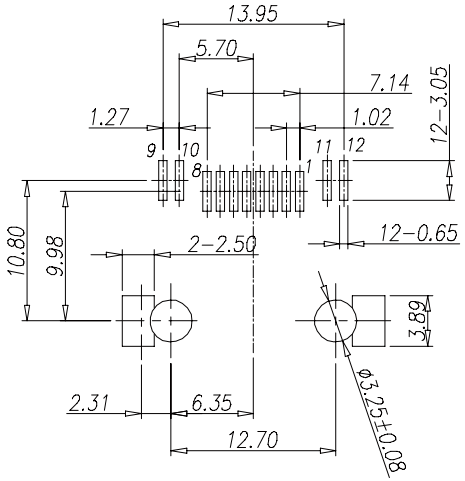

RECOMMEND PCB LAYOUT
PCB THICKNESS:1.60mm.
Jack Top View
PCB LAUOUT TOLERANCE:±0.05

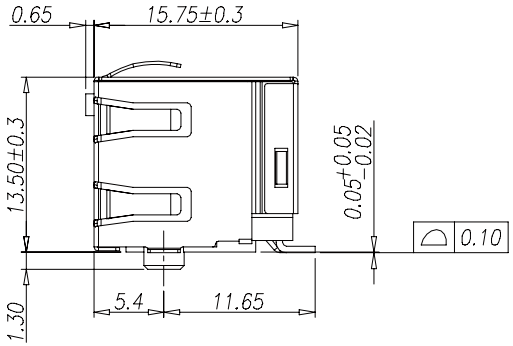

Specifications:

1. Rated Current: 1.5A
2. Contact resistance: 40mΩ MAX.
3. Insulation resistance: 500MΩ MIN.
4. Dielectric withstand: 500V AC for 1 minute
5. Operating temperature: −40°C~+80°C
6. Insert force: 35N MAX.
7. Withdraw force: 10N MIN.
8. Insertion/Extraction life: 750 Cycles
9. To Conform to the "RoHS Directive"
10. Resistance to reflow Soldering Heat 260°C 10 Seconds
11. Solder abilty Temperature 245±5°C, 5±0.5 Sec

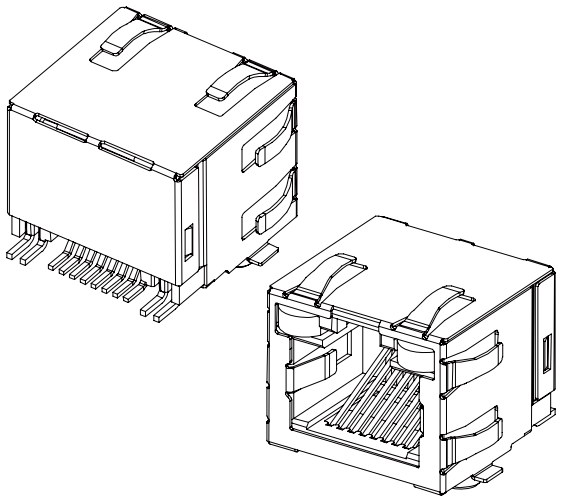

Wellco T&C Co., Ltd.	Gen.Tolerance .X ± 0.20 .XX ± 0.08 .XXX ± 0.05 ∠±1°	Scale	Not	P/N # 6031SLT-88A RJ45-8P8C-SMT	This spec drawing is under the property of Wellco T&C Co., Ltd.	Rev. A Page 1-1	DRW by Amy July 07 2011 CHK by Long July 11 2011 APP by Chin July 11 2011
		Unit	mm				
		Size					