

SUGGESTED PCB LAYOUT
TOP VIEW


Electrical Characteristics :

- Insulation Resistance : 500M Ω Min.
- Contact Resistance : 30m Ω Max.
- Withstand Voltage : 500 VAC 1 minute.
- Current Rating : 1.5A

Material:

Housing : Thermoplastic UL94V-0
 Contact : Full Gold Plating
 Spring Wire : Dia 0.45mm Phosphor Bronze
 Optional Gold Plating Over Nickel
 Shield : Brass, Nickel Plating.
 CUL File No : E215573

PART NO : 8 5 0 6 - B * 1 * S

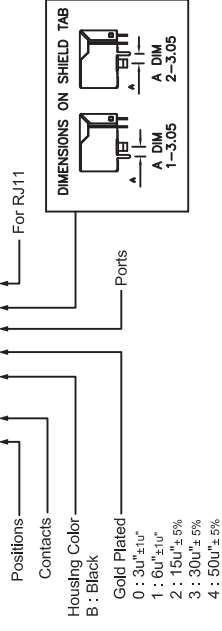

ZONE	REV.	DESCRIPTION	DATE	APPD.	FILE NO : 85 (SERIES)
(A)					TOLERANCE (公差) :
(B)					0.000 mm \pm 0.075 mm
(C)					0.00 mm \pm 0.15 mm
(D)					0.0 mm \pm 0.25 mm
(E)					

TITLE	SHIELDED SIDE ENTRY PCB JACK	UNIT	mm
圖名	SHIELDED SIDE ENTRY PCB JACK	單位	inch
PART NO.	8506-B * 1 * S	SCALE	1:1
料號		比例	
REV.	A.0	DATE	2007-06-21
版本		日期	
CHECKED BY	Michael	DRAWN BY	Connie
審核	製圖		

Wellco T&C Co., Ltd.