


ECN NO.	Revised Description	Revision	Date




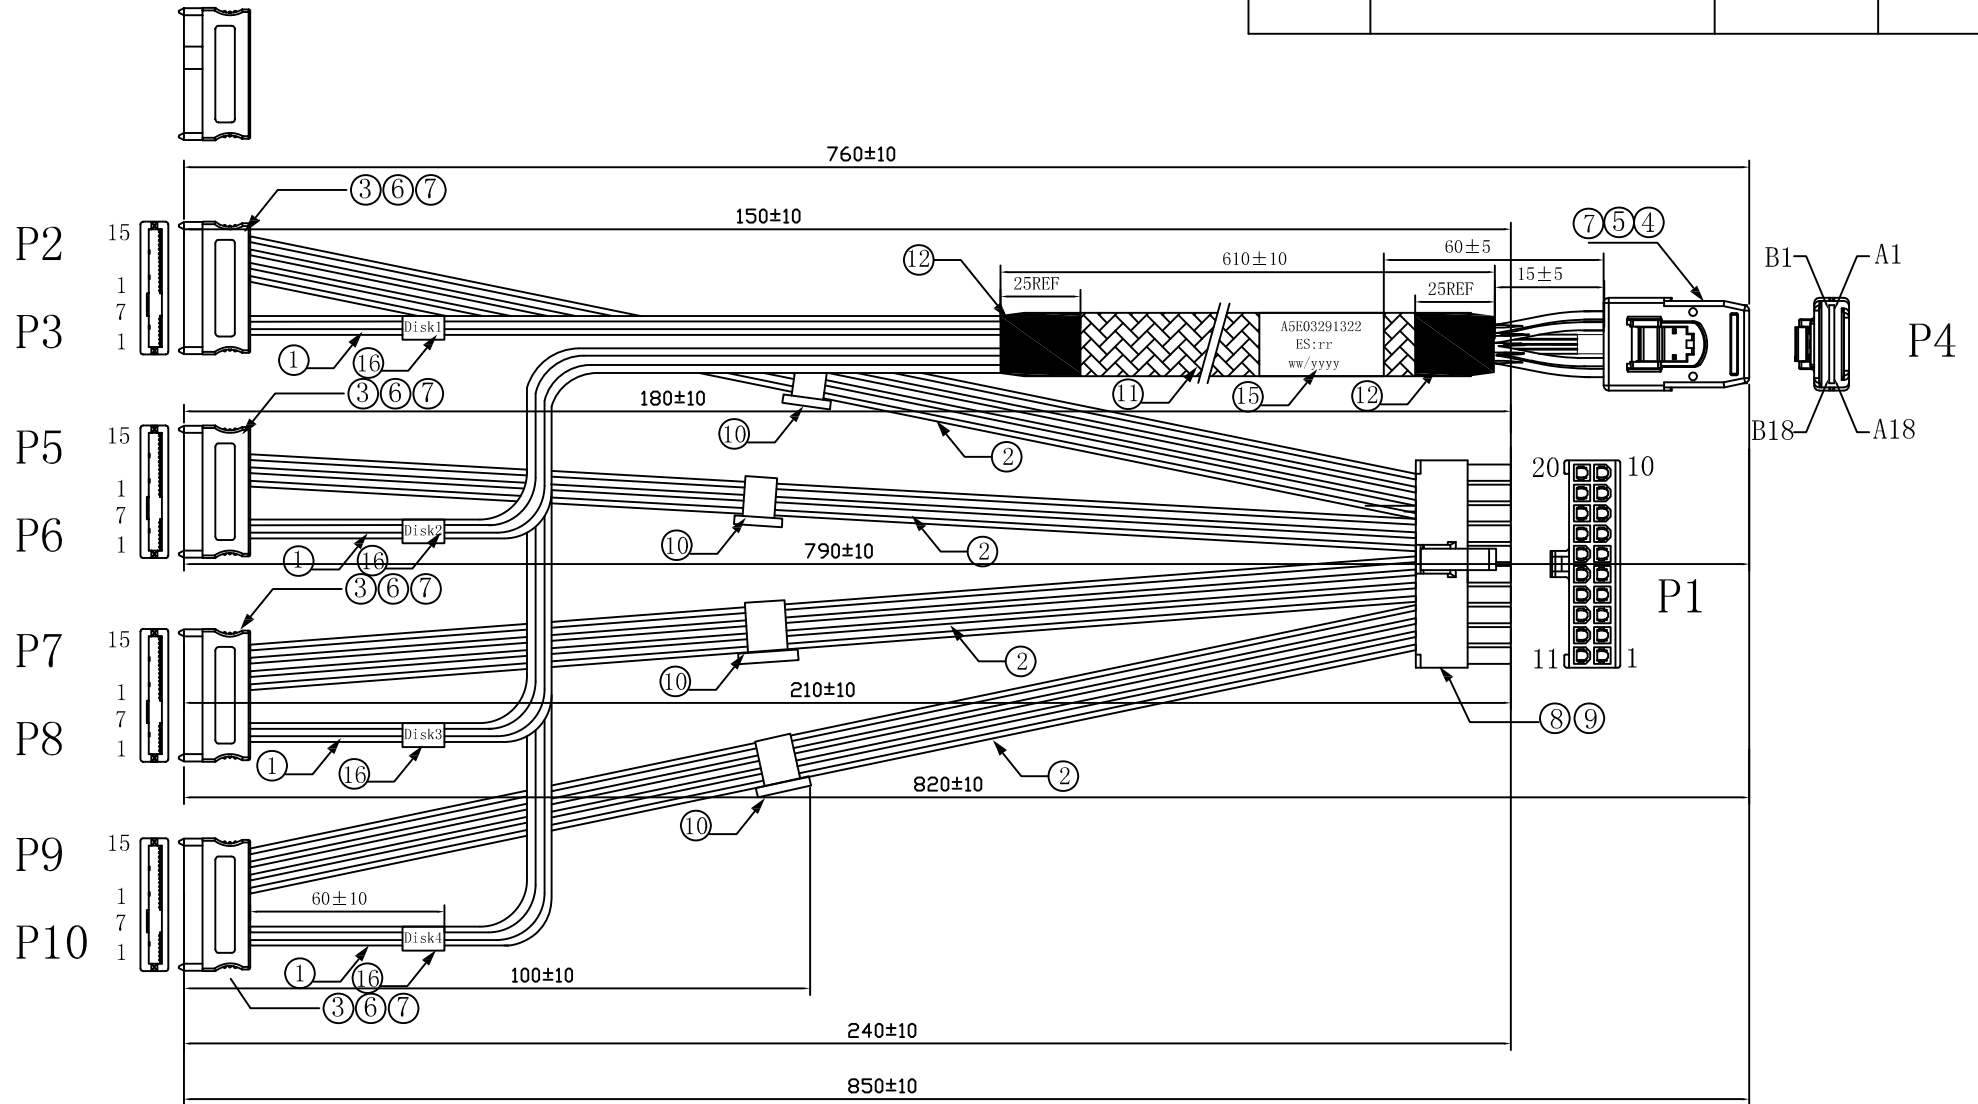


Wellco T&C Co., Ltd.


GEN. TOLERANCE	.X ± 0.30	SCALE	NOT	PRT. NO.	A120067-0	SAS 29P TO Mini SAS 36P+4.2 HSG 2X10P	REV.	DRW. BY	Mr.Chen 2012/10/06
	.XX ± 0.20	UNIT	MM				A0	CHK. BY	
	.XXX ± 0.10	SIZE		DWG. NO.	SHT.		APP. BY		
	∠ ± 1°				1 of 2				

Wired

contact:

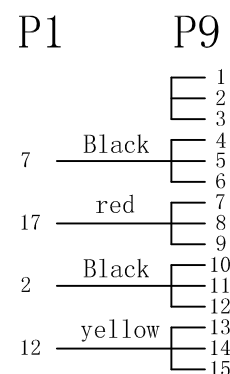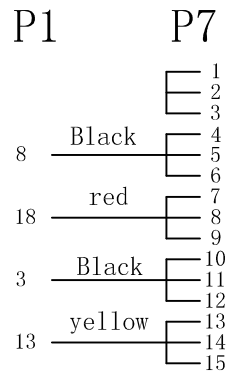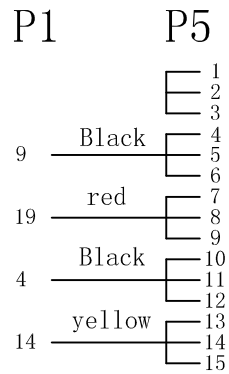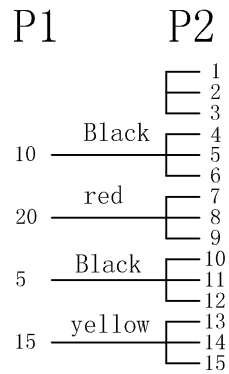

ECN NO.	Revised Description	Revision	Date

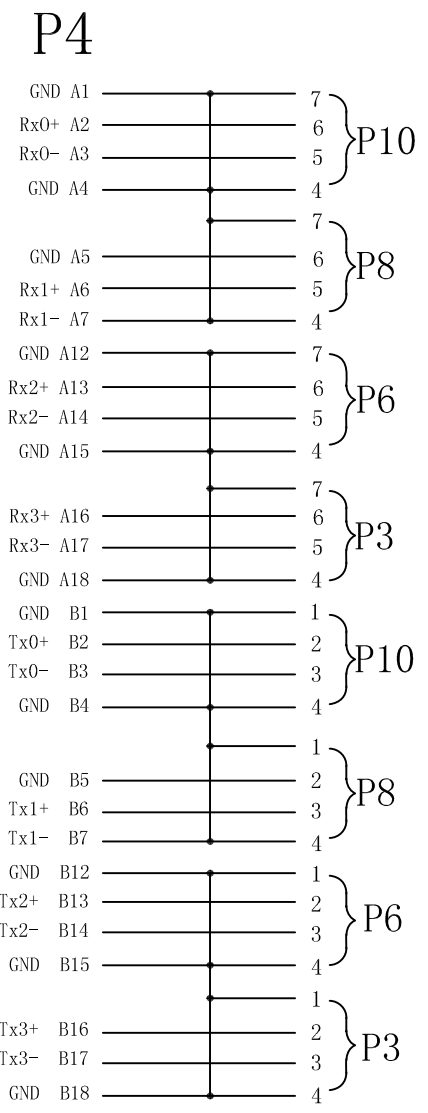

16	Transparents tags: 10*20MM		4PCS	
15	Transparents tags: 20*40MM			
14	Carton 400*340*300mm			
13	PE bag 310*230*0.05mm			
12	Tube: OD: 12.0MM black	YQ-YH0100012004	50MM	
11	Braid: Nylon OD: 10.0MM black	YQ-YN0100010033	610MM	
10	Black bundle 2.5MM*100MM	YQ-ZXB100	4pcs	
9	PH 4.2Ternimal; 5016T	YQ-YI0000501610	16pcs	
8	PH4.2HSG 2*10P white (5016-20P)	YQ-YJ1150162010	1pcs	
7	Over mold:PVC 45P black	YQ-YE0100004502	40g	
6	Inner mold:PE (Transparents)	YQ-YD1100000002	28g	
5	PBT+30%G.F RG301 R16K BLACK	SATA-C07F-B110A2-W10	2pcs	
4	Mini SAS 36P 4i PLUG CONTACT:G/F W/LATCH W/PCB	SAS-36M-1	1pcs	
3	SAS 29P(LCP+phosphor copper) crimp type:G/F	SAS-C29F-02C1A2-00L	4pcs	
2	UL 1007 18AWG red/yellow/black*2	YQ-YB0110071809 YQ-YB0310071809 YQ-YB0510071809	780*2mm 780mm 780mm	peel core pff:3mm(Double T)
	Wire: SAS 30AWG*2C+Drain+Shield blue ODO.95*2.32mm	YQ-YB0707583032	3200mm	peel foil off:5mm/peer off:3.5mm
ITEM	DESCRIPTION	SUPPLIER P/N	QTY	REMARK

- Test condition:
1. Finished products do 100% conductive test;
 2. Insulator resistance: 30M Ohms DC 300V;
 3. Contact resistance: 2 Ohms DC 300V;
 4. Delay time: 0.1~0.5second;

- Package:
1. 1pcs/bundle;
 2. 5pcs per one PE bag;
 3. 60PCS/carton;

Wellco T&C Co., Ltd.	GEN. TOLERANCE	SCALE	NOT	PRT. NO.	A120067-0	SAS 29P TO Mini SAS 36P+4.2 HSG 2X10P	REV.	DRW. BY	Mr. Chen 2012/10/06
	. X ± 0.30	UNIT	MM				AO	CHK. BY	
	. XX ± 0.20	SIZE	⌀	DWG. NO.	SHT.	APP. BY			
	. XXX ± 0.10				1 of 2				
i ± 1°									