

MAK.	QUA.	Description	REV.	DRW.	DATE
	1	Change The Tolerance	A3	hua	09-03-24
	1	增加中文说明	A4	LWX	10-07-17

NOTES(说明):


1. Operation Temperature: -20° TO $+85^{\circ}$
(使用环境温度范围: -20° TO $+85^{\circ}$)
2. Electrical Characteristics(电气特性):
 1. Rated Current: 1.5A@40VAC
(电流电压规格: 1.5A@40VAC)
 2. Contact resistance: 30m Ω (MAX)
(接触电阻: $\leq 30\text{m}\Omega$)
3. Terminal Plating(电镀规格):
 1. Ni 50u" Min Plated over Terminal
(端子镀镍厚度 $\geq 50\text{u}"$)
 2. Au G/F Plated on Contact Area
(端子接触部位镀金厚度G/F)
 3. Tin 80u" MIN Plated on Solder&Crimp Area
(端子接线部位镀锡厚度 $\geq 80\text{u}"$)

CODE EXPLAIN:

SATA-X 00 X-00 X0 X0-00 0
 1 2 3 4 5 6 7 8 9

1. SATA--Product Series
2. X--Pitch of Housing
C: 1.27 Pitch of Housing
3. 00--Pin NO. of Housing
4. X--M: Male; F: Female
5. 00--Housing NO.
6. X0--Links Way of Terminal with Wire
P4: DIP Way of Terminal with wire
7. X0--Plating Specification
A2: Au G/F Plated
8. 00--PEG NO.
9. 0--Housing Material

③	PEG	TG-C07M-002	BRASS-C2680	2PCS
②	TERMINAL	TS-C07M-P04	BRASS-C2680-H T=0.25	7PCS
①	HOUSING	HSS-C07M-B02	LCP G/F UL94-V0	1PC
NO.	P/NAME	P/N	SPECIFICATION	USAGE

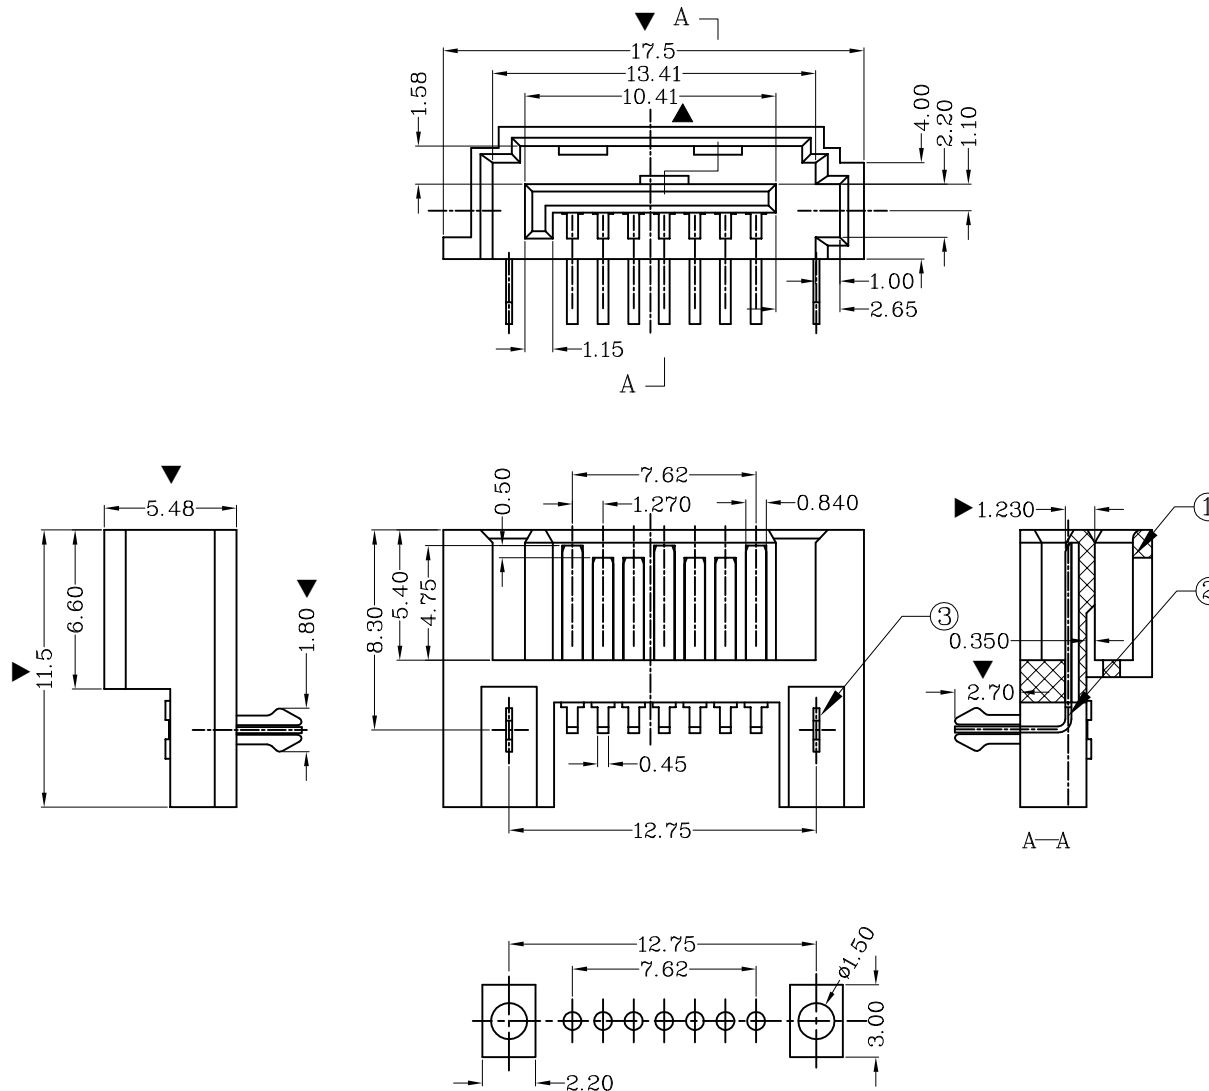

PCB LAYOUT
PCB TOLERANCE $\pm 0.05/-0.05$

注: 标注▲尺寸为检验尺寸

Wellco T&C Co., Ltd.

GEN. TOLERANCE	SCALE	NOT	PRT. NO.	SATA-C07M-B2P4A2-G2L	SATA 07P	REV.	DRW. BY	华伟 2009/03/24
.X ± 0.20	UNIT	MM			公座DIP型	A4	CHK. BY	
.XX ± 0.08	SIZE		DWG. NO.		镀金 G/F	SHT.	APP. BY	
.XXX ± 0.05						1 of 1		
$\angle \pm 1^{\circ}$								