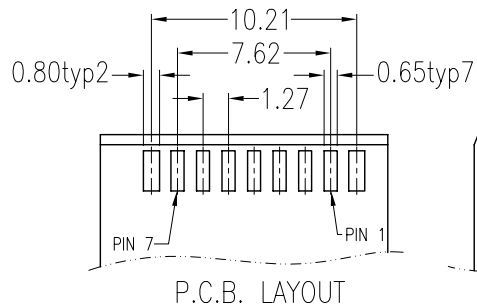
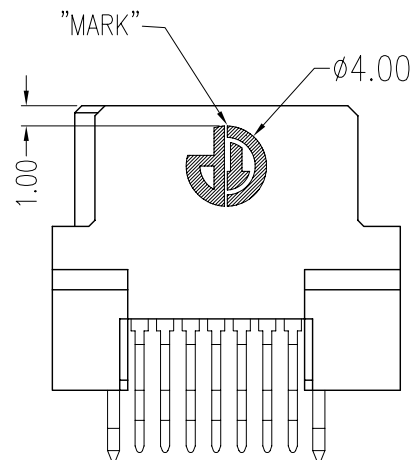
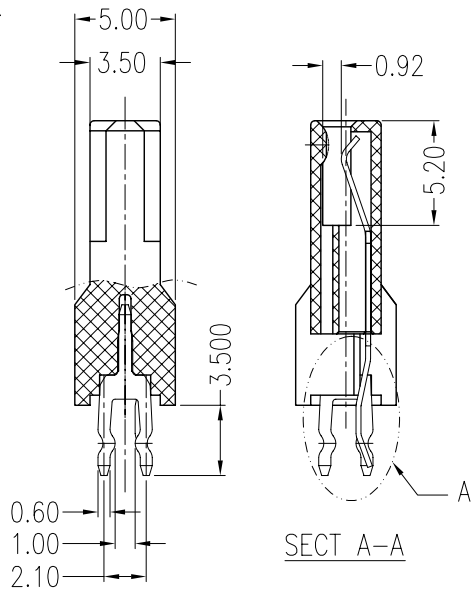
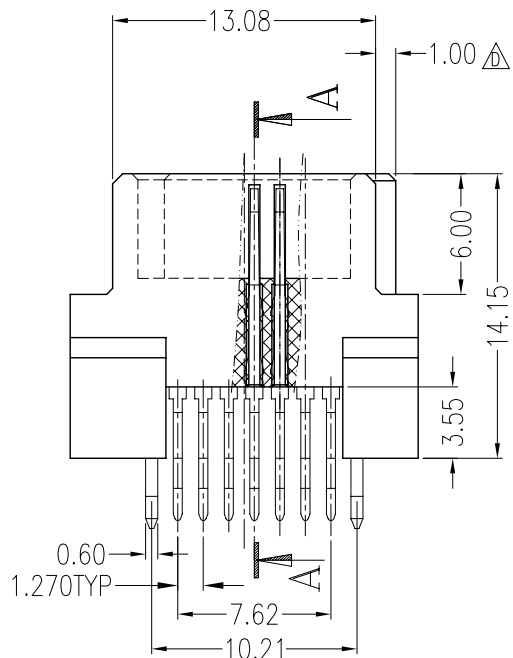
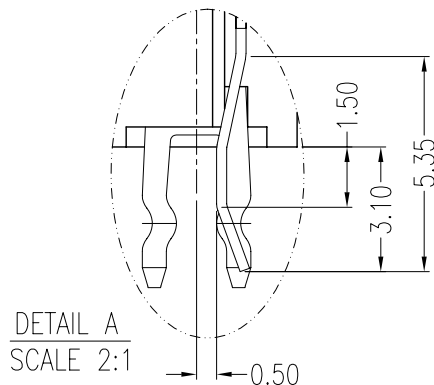
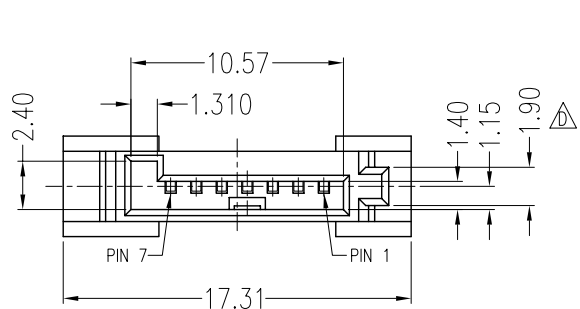


NOTES:

*Material

Body: LCP UL 94V-0 Rated, Color: Black

Contacts: Phosphor Bronze.

Plating: Gold Plating over Nickel on contact area;
Tin plating on solder tail.

*Electrical Specification

Operation Voltage: 100 VAC max.

Current Rating: 1.5 Ampere per contact

Contact Resistance: 30 Milliohms max.

Insulation Resistance: 1000 Megohms min.

Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature: -55°C ~ 125°C.

*How To Order

WATE-07 D 4 L 1 P U C 4
 4:Tube Packing
 C:CONNTOP
 U:Lead Free
 P:Phosphor Bronze
 1:Black
 L:LCP N4:Nylon46
 4:Straddle Style
 A:Flash D:15u" F:30u"
 Number of Contacts(7PIN)
 Serial ATA for Mother

REV Change body,Add Dim 1.90,1.00.

Units	mm	Scale	3:1	Drawing By	Data
				Lulu	07/11/07
Tolerance Unless Otherwise Specified				Reviewed By	Data
	.X		±0.38	Roger	07/11/07
	.XX		±0.25	Approval By	Data
	.XXX		±0.20	Richard	07/11/07
	Angle		± 3°		

Wellco T&C Co., Ltd.

Date 07/11/07
 Sheet 1 of 1
 Title SATA 7P Add High Female (Straddle Type)

Third Angle Projection
 Drawing No. WATE-07PS-AN-N118 REV D