



1 2 3 4 5 6 7 8


A

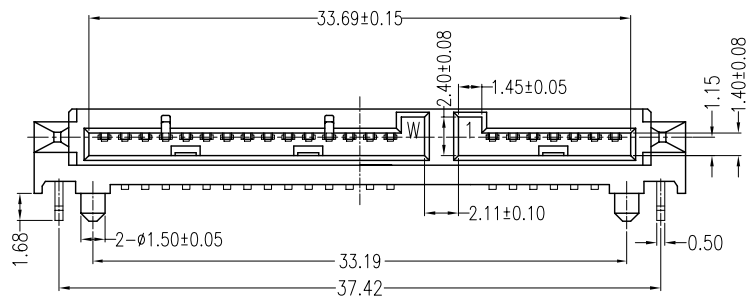



B

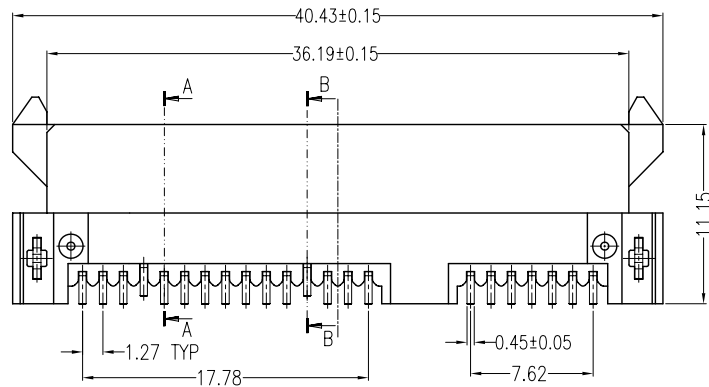

C

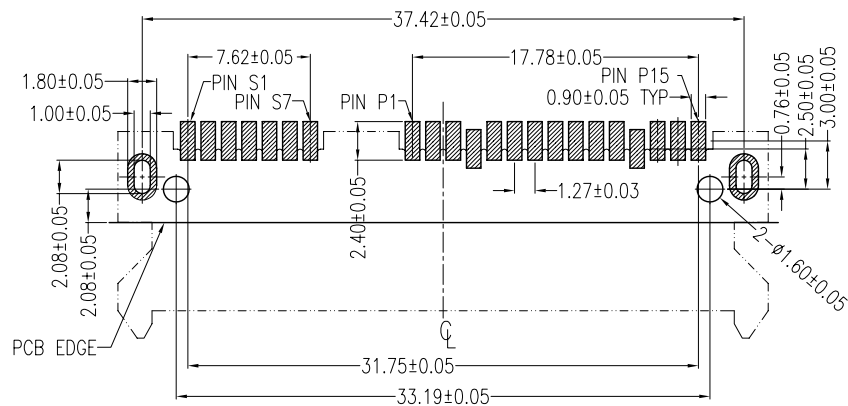

P.C.B LAYOUT
TOP VIEW (T=1.20)

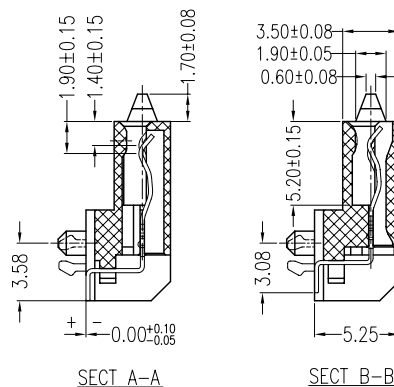

Product 3D

Notes:

*Material

Housing: LCP, UL 94V-0 rated;
Color: Black.
Contact: Phosphor Bronze
Plating: Gold Plating over Nickel on contact area;
Tin plating on Solder Tail.

*Mechanical

Insertion Force: 45N max.
Withdrawal Force: 10N min.
Durability: 500 cycles

*Electrical Specification

Operation Voltage: 100 VAC max.
Current Rating: 1.5 Ampere per contact
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 1000 Megohms min.
Dielectric Withstanding Voltage: 500 VAC

*Environmental

Operating Temperature: -55°C to +85°C

*How to order:

WATB 22 D L 1 P H U
Blank: No Mark
U: Lead Free
H: SMT(5.25)
P: Phosphor Bronze
1: Black
L: LCP
Selective Gold: A:Flash,D:15u"
NO. of Contacts
Series No.

D

REV																							
Units	mm	Scale	1:1	Drawing By				Data				Wellco T&C Co., Ltd.											
Tolerance Unless Otherwise Specified				Reviewed By				Data														Date	
.X ~ ±0.38												Sheet		1 of 1									
.XX ~ ±0.25				Approval By				Data				Third Angle Projection											
.XXX ~ ±0.20																Drawing No.							
Angle ~ ± 3°																		REV					

1 2 3 4 5 6 7 8