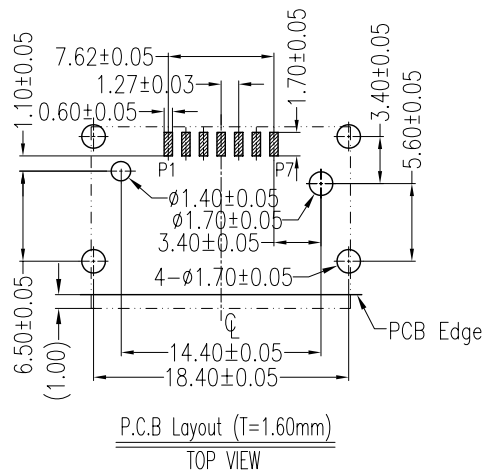
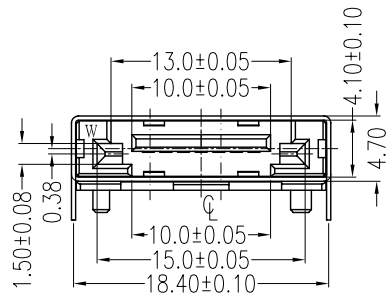
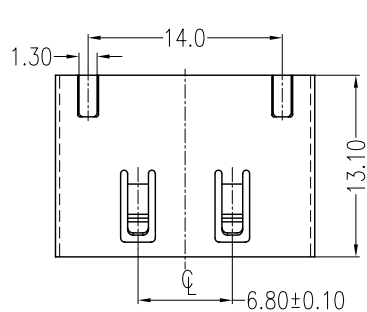



NOTES:

*Material

Housing: LCP(Black),UL 94-0 Rated;
Contact: Brass;
Plating: Gold plating over Nickel on contact area; Tin Plating on Solder Tail.
Shell: Brass Nickel Plating

*Mechanical

Insertion Force: 4080g max;
Withdrawal Force: 1020g min;
Durability: 2500 cycles.

*Electrical Specification

Current Rating: 1.5 Ampere per contact
Contact Resistance: 30m OHM MAX
Insulation Resistance: 1000M OHM MIN
Dielectric Withstanding Voltage:500VAC.

*Environmental

Operating Temperature : -55°c to +125°c.

*How to order:

WAT2A - 07 D 3 L 1 B U W N
N:NONE Spring
U:Lead Free
B:Brass
1:Black
L:LCP
3:SMT(Reverse)
Gold A:Flash D:15u" F:30u"
Number of contacts
Serial ATA II Right Angle Male(SAS)

REV													
Units	mm	Scale	1:1	Drawing By		Data		Wellco T&C Co., Ltd.					
Tolerance Unless Otherwise Specified				Reviewed By		Data							
				Approval By		Data		Sheet	1 of 1				
								Third Angle Projection					
				.X ~ ±0.38									
.XX ~ ±0.25													
.XXX ~ ±0.20													
Angle ~ ± 3°													