


*Material

Housing: LCP, UL 94V-0 rated, Color: Black;
Contact: Brass;
Plating: Gold plating over Nickel on contact
area; Tin plating on solder tail.
Harpoon: Phosphor Bronze;
Plating: Tin plating over Nickel.




*Mechanical

Insertion Force: 25N max.
Withdrawal Force: 5N min.
Durability: 500 cycles

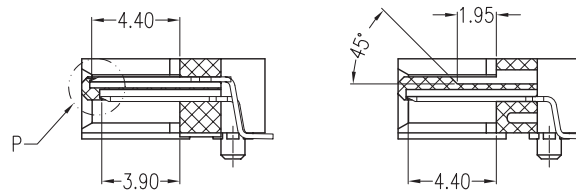

SECT A-A
SCALE 2:1

SECT B-B
SCALE 2:1



VIEW P
SCALE 6:1

*Environmental

Operating Temperature: 0°C to +55°C

*How to order

WSAM-29 F 3 L 1 B U 3

3:Tray
Blank:No Mark
U:Lead Free Blank:Sn Pb
B:Brass
1:Black
L:LCP
3:SMT Standard(4.00mm)
Gold A:Flash D:15u" F:30u"
Number of Contacts
Series No.



REV												
Units	mm	Scale	5: 4	Drawing By Stacy		Wellco T&C Co., Ltd.						
Tolerance Unless Otherwise Specified .X ~ ±0.38 .XX ~ ±0.25 .XXX ~ ±0.20 Angle ~ ± 3°				Reviewed By Roger		Date			Title	SAS 7+15+7P SMT Type (Standard) Male		
				Approval By Richard		Sheet	1 of 1					
						Third Angle Projection						
								Drawing No.	WSAM-29PS-AN-N121			REV