

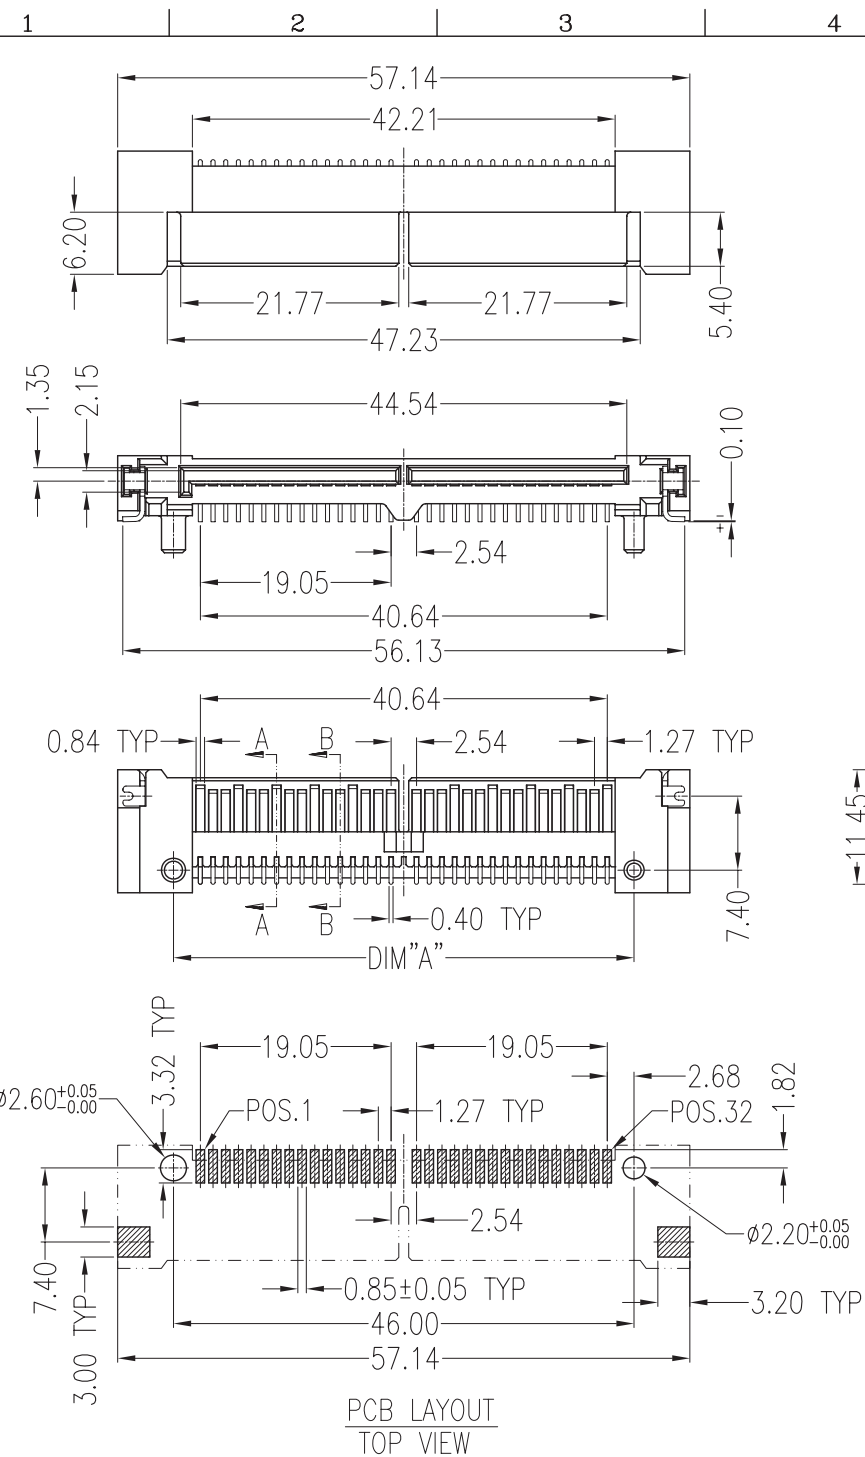


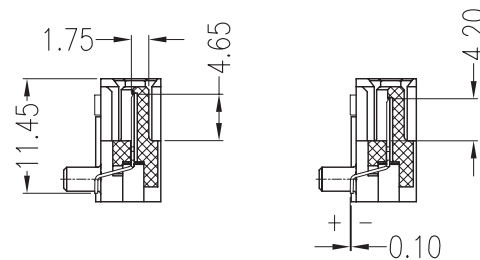

	DIM"A"
Short	46.00mm
Long	49.81mm



NOTES:

*Material

Housing: LCP, UL 94V-0 rated, Color: Black;
Contact: Brass;
Plating: Gold plating over Nickel on contact area; Tin plating on solder tail.
Harpoon: Brass;
Plating: Tin plating over Nickel.

*Mechanical

Insertion Force: 9.8N max.
Withdrawal Force: 1.96N min.
Durability: 500 cycles

*Electrical Specification

Current Rating: 1 Ampere per contact;
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 1000 megohms min.
Dielectric Withstanding Voltage: 500 V AC.

*Environmental

Operating Temperature: -55°C to +125°C

*How to order

WSAS-32 D 3 N9 1 B U W 3
3:Tray
U:Lead Free
B:Brass
1:Black
N9:Nylon9T N6:Nylon6T
3:SMT
Gold A:Flash D:15u" F:30u"
Number of Contacts
Series No.

Blank:No Mark
Blank:Sn Pb

REV	Units	mm	Scale	1:1	Drawing By	Data	Wellco T&C Co., Ltd.			
					Jerry		Date			
					Reviewed By	Data	Sheet	1 of 1	Title	SAS 32P R/A SMT MALE
					Roger		Third Angle Projection			
					Approval By	Data				
					Richard					
							Drawing No.		REV	