


REV.	ECN.NO.	DATE
A	RELEASED	11/23-'07

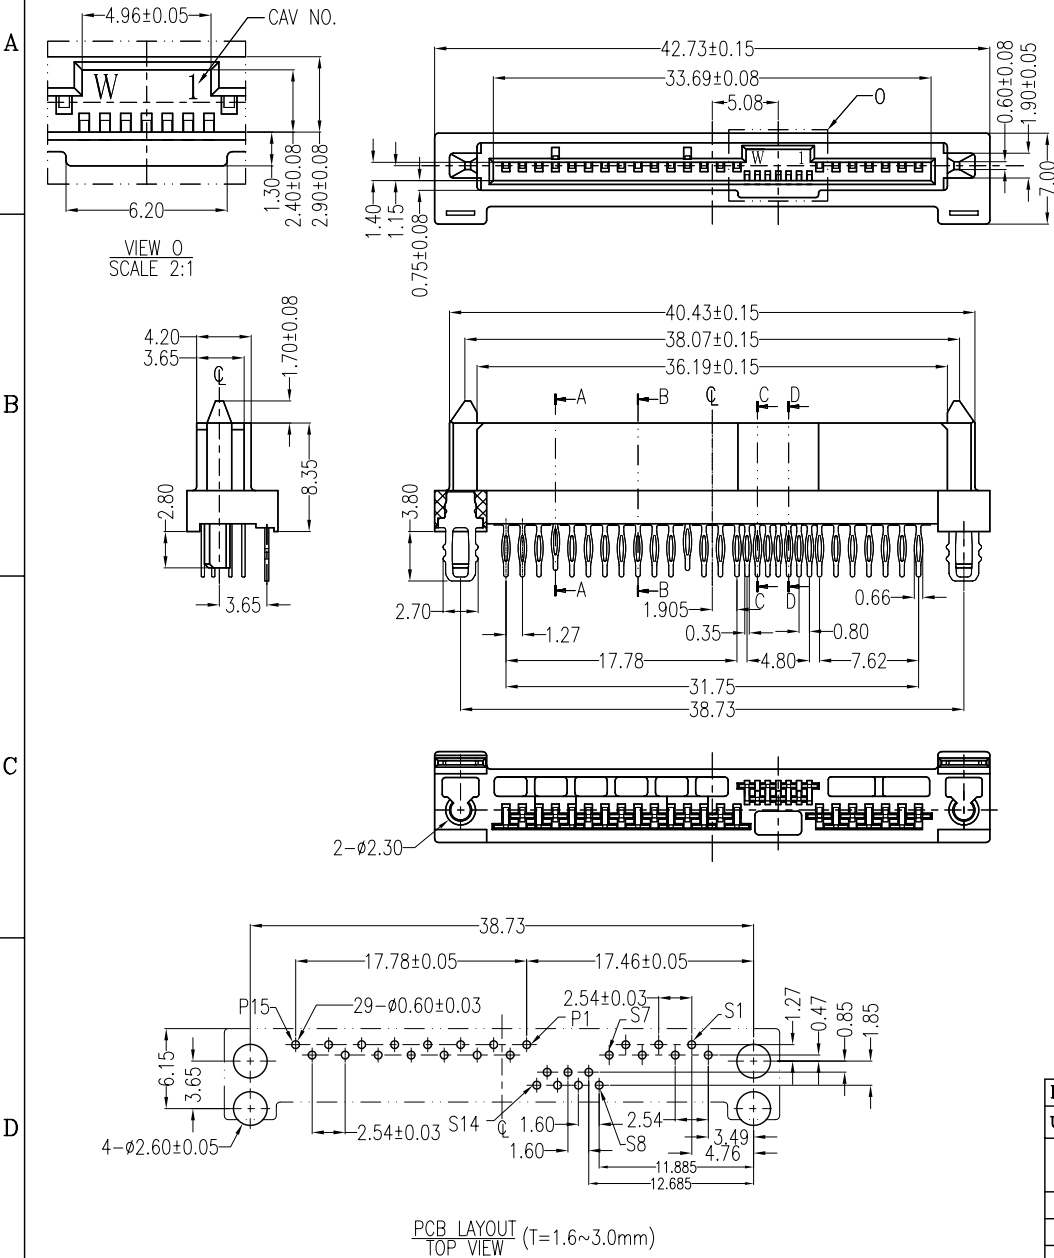

NOTES:

***Material**
Housing: Nylon9T, UL 94V-0 rated,Color: Black;
Contact: Phosphor Bronze;
Plating: Gold plating over Nickel on contact area; Tin plating on solder tail.

Harpoon: SUS;
Plating: Non

***Mechanical**
Insertion Force: 25N max.
Withdrawal Force: 5N min.
Durability: 500 cycles

***Electrical Specification**
Current Rating: 1 Ampere per contact;
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 1000 megohms min.
Dielectric Withstanding Voltage: 500 V AC.

***Environmental**
Operating Temperature: 0° C to +55° C

***How to order**

WSAP-29 F 5 N9 1 P U 3

3:Tray
W:Winning Mark Blank:No Mark
U:Lead Free
P:Phosphor Bronze
1:Black
N9:Nylon9T
5:Press Fit
Gold A:Flash D:15u" F:30u"
Number of Contacts
Series No.

REV													
Units	mm	Scale	5:3	Drawing By		Data		Wellco T&C Co., Ltd.					
Tolerance Unless Otherwise Specified				Reviewed By		Data						Date	11/23-'07
.X ~ ±0.38				Approval By		Data		Sheet	1 of 1				
.XX ~ ±0.25								Third Angle Projection					
.XXX ~ ±0.20										Drawing No.		REV	A
Angle ~ ± 3°													