


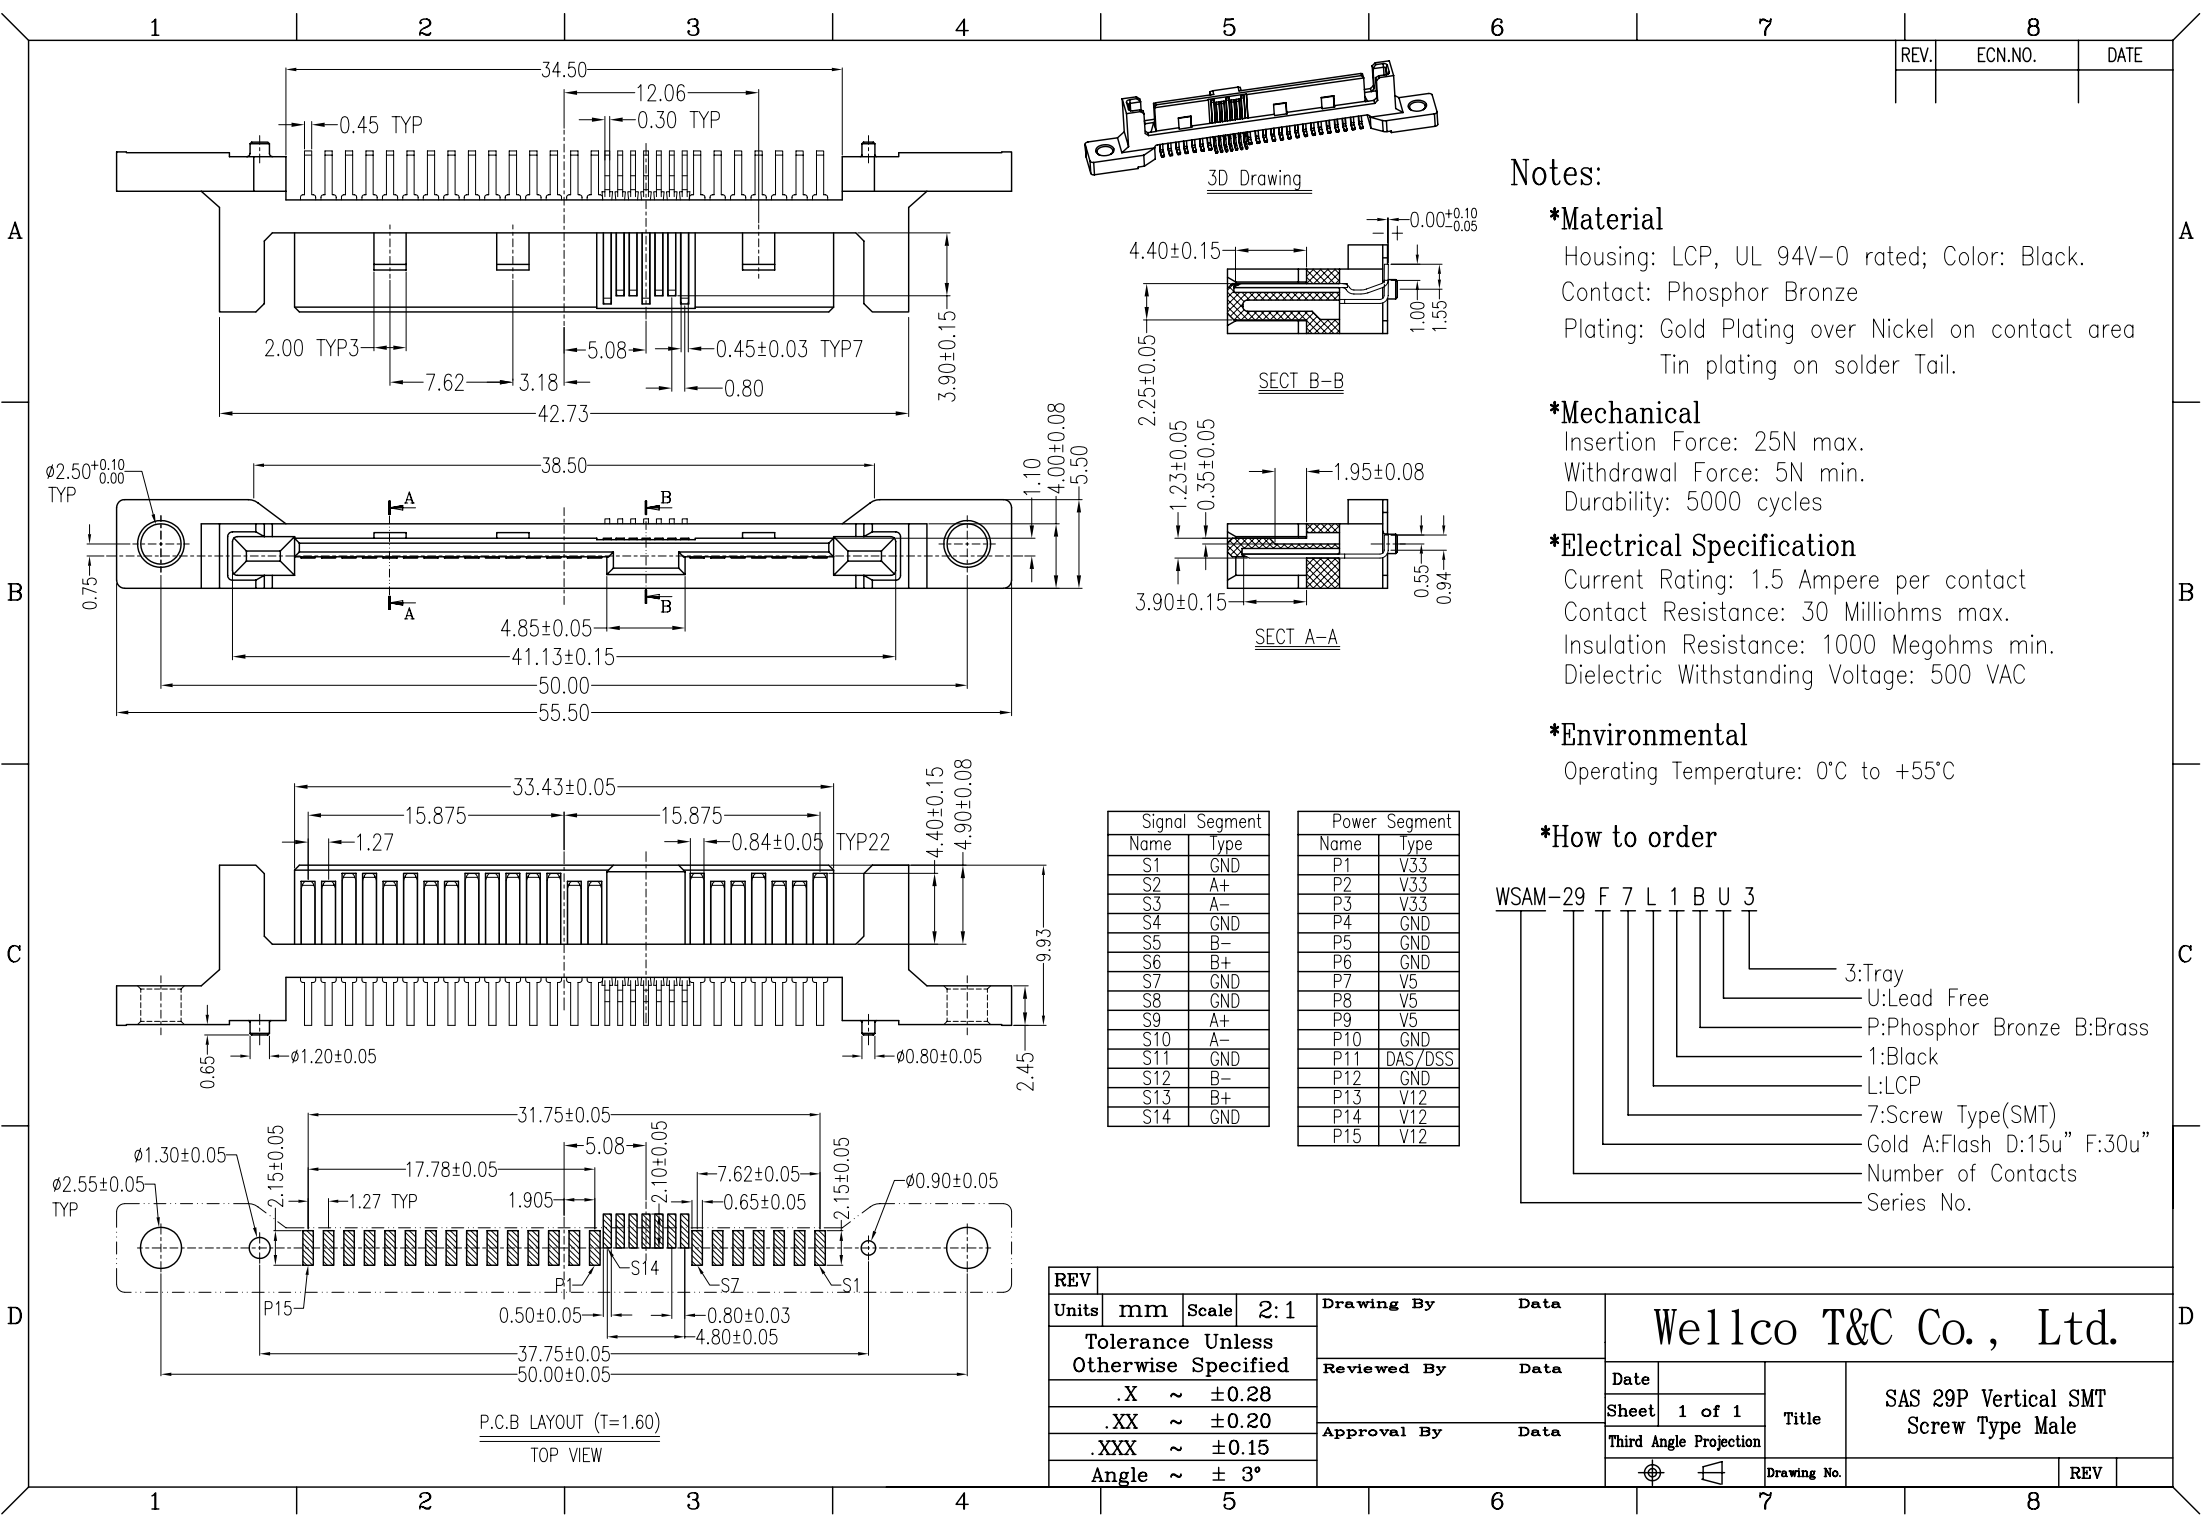

Notes:

***Material**
Housing: LCP, UL 94V-0 rated; Color: Black.
Contact: Phosphor Bronze
Plating: Gold Plating over Nickel on contact area
Tin plating on solder Tail.

***Mechanical**
Insertion Force: 25N max.
Withdrawal Force: 5N min.
Durability: 5000 cycles

***Electrical Specification**
Current Rating: 1.5 Ampere per contact
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 1000 Megohms min.
Dielectric Withstanding Voltage: 500 VAC

***Environmental**
Operating Temperature: 0°C to +55°C

***How to order**

WSAM-29 F 7 L B U 3
3:Tray
U:Lead Free
P:Phosphor Bronze B:Brass
1:Black
L:LCP
7:Screw Type(SMT)
Gold A:Flash D:15u" F:30u"
Number of Contacts
Series No.

REV														
Units	mm	Scale	2:1	Drawing By		Data		Wellco T&C Co., Ltd.						
Tolerance Unless Otherwise Specified						Reviewed By		Data		Date	Title		SAS 29P Vertical SMT Screw Type Male	
										Sheet				
				.X ~ ±0.28		Approval By		Data		Third Angle Projection				
				.XX ~ ±0.20										
.XXX ~ ±0.15														
Angle ~ ± 3°								Drawing No.		REV				