REV.	ECN.NO.	DATE

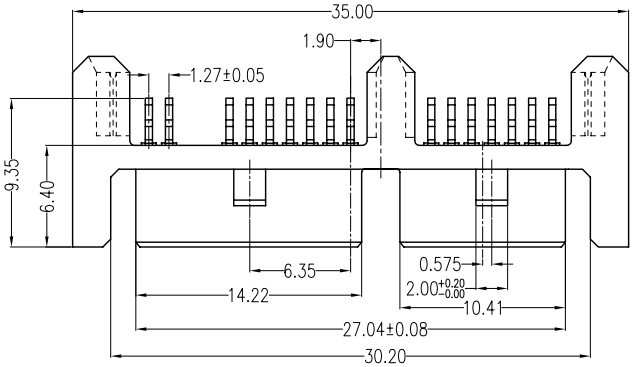

Pin Number	Signal Name
S1	GND
S2	RX+
S3	RX−
S4	GND
S5	TX−
S6	TX+
S7	GND

Pin Number	Power Line Designation
P1	+3.3V
P2	+3.3V
P3	GND
P4	GND
P5	+5.5V
P6	+5.5V
P7	DAS/DSS
P8	Optional
P9	Optional

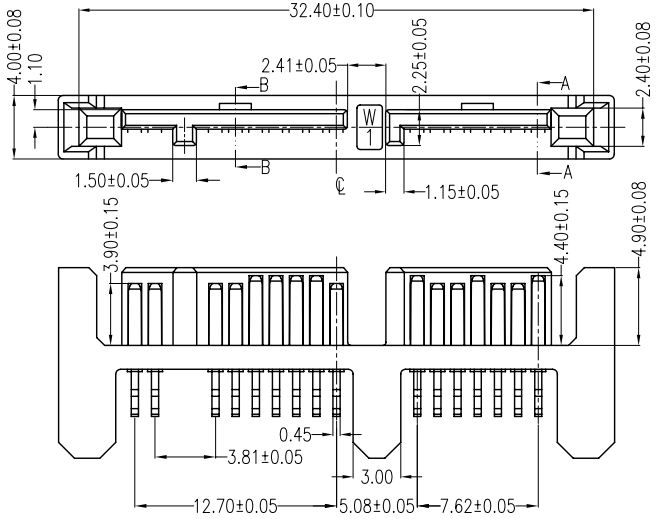



Section:A−A



Section:B−B

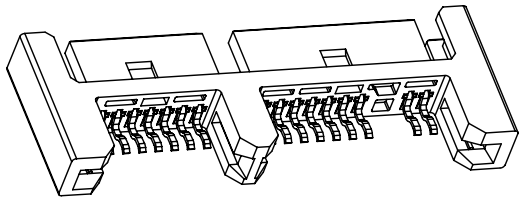

3D Product

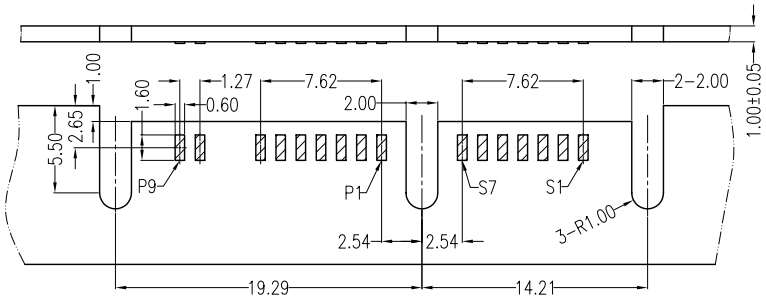

RECOMMENDED PCB LAYOUT

NOTES:

*Material
Housing: LCP, UL 94V−0 rated, Color: Black;
Contact: Brass;
Plating: Gold plating over Nickel on contact area; Tin plating on solder tail.

*Mechanical
Insertion Force: 45N max.
Withdrawal Force: 10N min.
Durability: 500 cycles

*Electrical Specification
Current Rating: 1.5 Ampere per contact;
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 1000 megohms min.
Dielectric Withstanding Voltage: 500 V AC.

*Environmental
Operating Temperature: −55°C to +85°C

*How to Order:

WATV−16 D 7 L 1 B U 4

- Series No.
- NO. of Contacts
- Selective Gold: A:Flash,D:15u"F:30u"
- 7: Straddle(6.4)
- L: LCP
- 1: Black
- B: Brass
- U: Lead Free
- 4: Tube

REV					
Units mm Scale 2:1	Drawing By Data	Wellco T&C Co., Ltd.			
Tolerance Unless Otherwise Specified	Reviewed By Data	Date		Title	Micro SATA 7+7+2P Straddle Male(6.4)
.X ~ ±0.38		Sheet 1 of 1			
.XX ~ ±0.25	Approval By Data	Third Angle Projection		Drawing No.	WATV−16PS−AN−N245 REV
.XXX ~ ±0.20					
Angle ~ ± 3°					