REV.	ECN.NO.	DATE
A	RELEASED	



VIEW O
SCALE 2:1

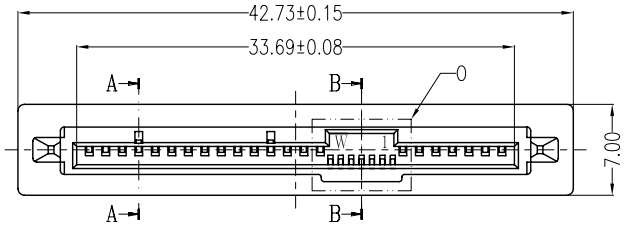



SECTION A–A



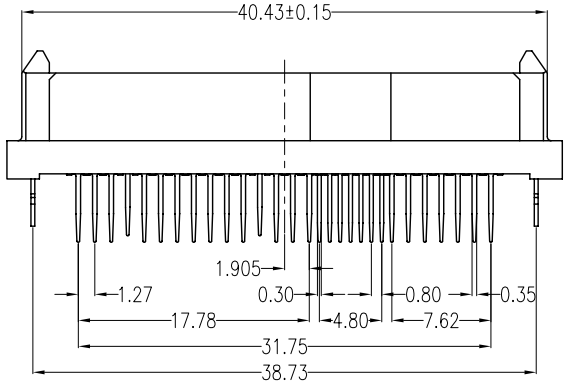



SECTION B–B

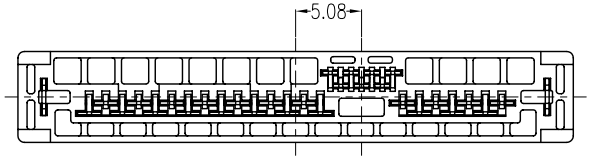



Product 3D Dwg

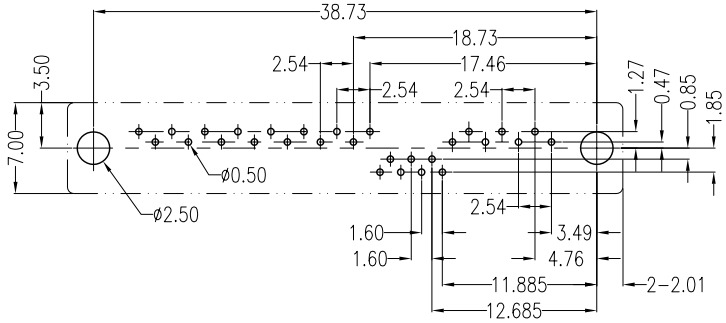

PCB LAYOUT

NOTES:

*Material

Housing: LCP, UL 94V–0 rated, Color: Black;
Contact: Phosphor Bronze;
Plating: Gold plating over Nickel on contact area; Tin plating on solder tail.
Harpoon: Brass;
Plating: Tin plating over Nickel.

*Mechanical

Insertion Force: 25N max.
Withdrawal Force: 5N min.
Durability: 500 cycles

*Electrical Specification

Current Rating: 1 Ampere per contact;
Contact Resistance: 30 Milliohms max.
Insulation Resistance: 1000 megohms min.
Dielectric Withstanding Voltage: 500 V AC.

*Environmental

Operating Temperature: 0° C to +55° C

*How to order

WSAF–29 F 1 L 1 P U – 4

- 4:Tube
- W:Winning Mark Blank:No Mark
- U:Lead Free
- P:Phosphor Bronze
- 1:Black
- L:LCP
- 1:Double Row DIP(4.0)
- Gold A:Flash D:15u" F:30u"
- Number of Contacts
- Series No.

REV					
Units	mm	Scale	5:3	Drawing By	Data
Tolerance Unless Otherwise Specified				Reviewed By	Data
.X ~ ±0.38				Approval By	Data
.XX ~ ±0.25					
.XXX ~ ±0.20					
Angle ~ ± 3°					

Wellco T&C Co., Ltd.

Date		Title	SAS 29P Lengthen Double Row DIP Female (4.0) CRT
Sheet	1 of 1		
Third Angle Projection		Drawing No.	REV A