

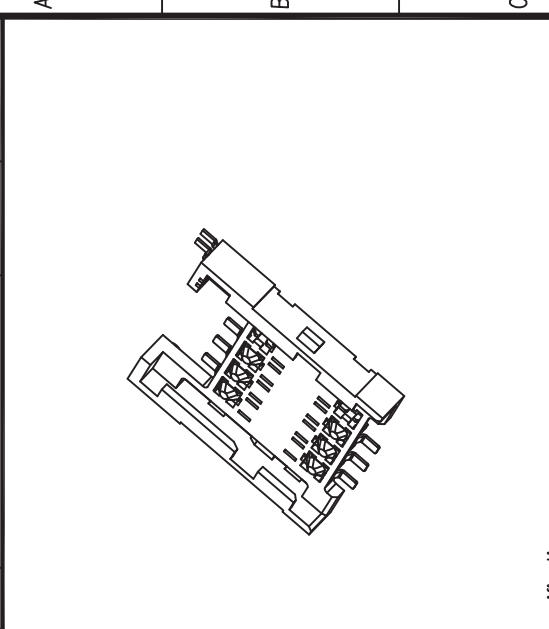
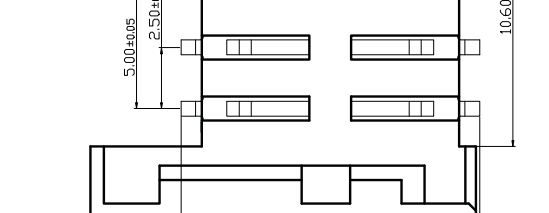


REV.	DESCRIPTION	APPD	DATE

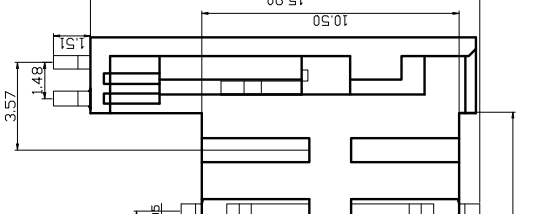

Specification

- *Electrical Characteristics:
 - Contact Current Rating: 0.5 Amperes.
 - Dielectric Withstanding Voltage: AC500V r.m.s.
 - Insulation Resistance: 1000 MΩ Minimum.
 - Contact Resistance: 40 mΩ Maximum.
- *Environmental:
 - Operating Temperature: -25°C~+90°C.
 - *Environmental:
 - Mating Cycles: 10,000 Insertions.
 - *Mechanical Characteristics:
 - Card Push Insertion/Out Force: 0.7~1.20kgf.
 - Contact Separation Force: 0.20kgf Minimum.
 - *Material:
 - Insulator: HI-Temp Plastic UL 94V-0 Rated.
 - Contact: Copper Alloy (t=0.15mm).
 - Shell: Stainless Steel (t=0.20mm).
 - Spring: SWP.

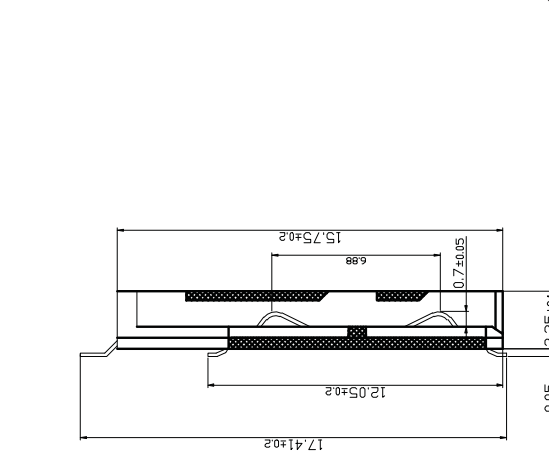

P/N # Sim-208S

MATERIAL:		SIM-6PIN-008	
FINISH:			
LOT NO:		UNIT: MM	SIZE: A4
COLOR:			
DR: Robert Liu 09/08/03			
TOLERANCE UNLESS			
X	±0.40		
.X	±0.30		
.XX	±0.20		
X*	±5*		
TITLE: SIM CARD CONNECTOR		DWG NO:	
6PIN SMT		SCALE: 1:1	
		SHEET: 1 OF 1	
		REV: A/1	

Wellco T&C Co., Ltd.

PCB Layout