



1	2	3	4	5	6	7	8
REV.	DESCRIPTION OF REVISIONS	APPR.	DRAW.	RELEASE	DATE		
X1							
X2							

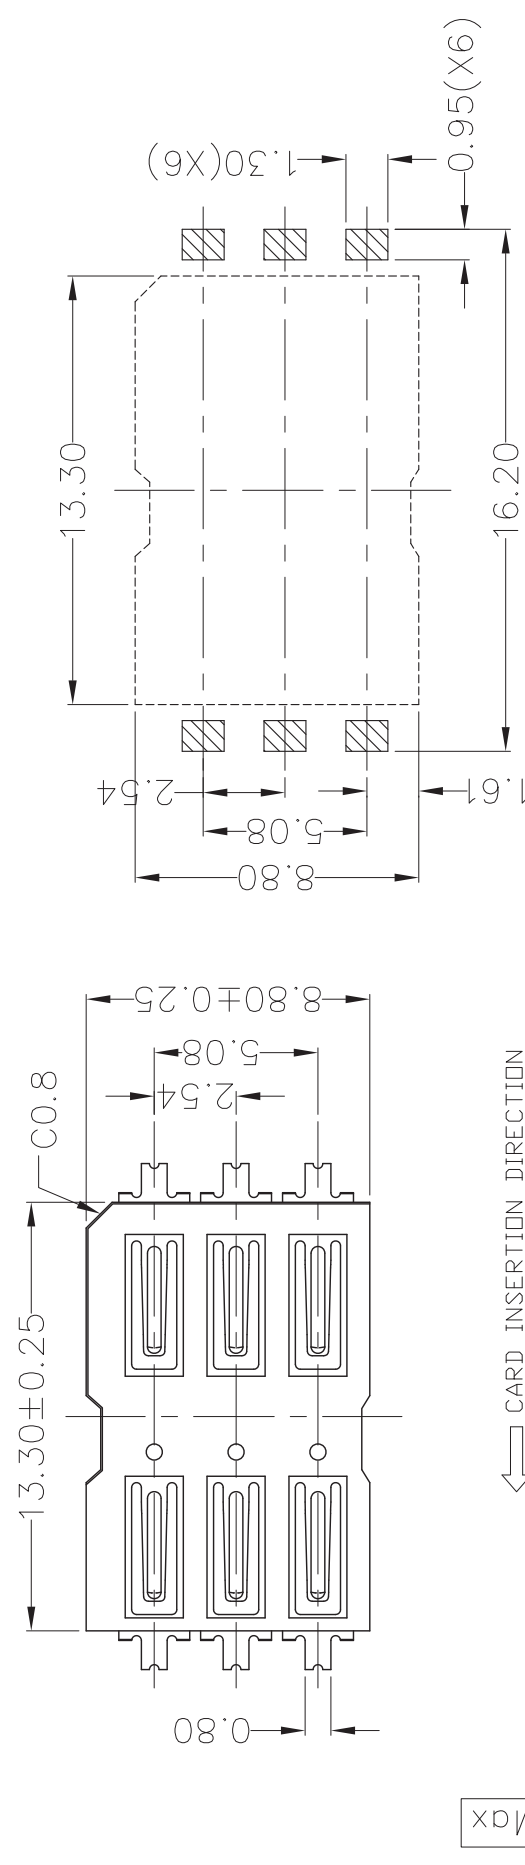

RECOMMENDED P.C.B LAYOUT  
COMPONENT SIDE(TOLERANCE  $\pm 0.05$ )

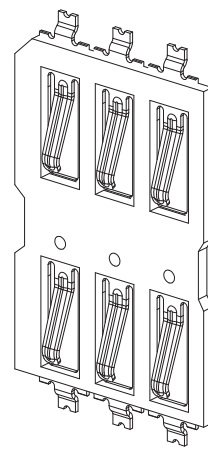

**TECHNICAL CHARACTERISTICS**

- General Characteristics
  - Dimensions: 13.30L X 8.80W X 0.80H mm
  - Weight: Approx 0.50  $\pm$  0.1g
  - Durability: 5,000 cycles min.
- Electrical Characteristics
  - Contact resistance: 50m $\Omega$  typical, 100m $\Omega$  max
  - Insulation resistance: >1000M $\Omega$ /500V DC
- Solderability
  - Vapor phase: 215°C, 30sec. Max
  - IR reflow: 250°C, 5sec. Max
  - Manual soldering: 370°C, 3sec. Max
- Environmental Characteristics
  - Operating temperature: -40°C ~ +85°C
  - Operating humidity: 10% ~ +95%RH



ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	BASE	1	Hi-temp Thermoplastic	Black UL94V-0
2	DATA CONTACT	6	Copper Alloy	Contact area: Gold plated

Unless otherwise specified, other tolerance are:		NAME: <b>Smart Card Acceptor</b>	
X $\pm 0.35$	X* $\pm 5^*$	MODEL NO: <b>726</b>	
X.X $\pm 0.25$	X.X* $\pm 4^*$	TYPE: <b>6pin H0.80 mm</b>	
X.XX $\pm 0.15$	X.XX* $\pm 3^*$	DRAWN: Zoey Sep.13.2010 DWG NO.:	
X.XXX $\pm 0.10$	X.XXX* $\pm 2^*$	CHECKED: Sean Sep.13.2010	
PROJ.	UNIT	SCALE	APPROVAL: Simon Sep.13.2010
	mm	1:1	SHEET 1/1
CUSTOMER DRAWING		REVISION X1	

**Wellco T&C Co., Ltd.**