


A



B

C

D



REV.	ECN NO.	DESCRIPTION	DRAW	CHK.	APPD.	DATE
△	ECN1008280109	新版发行	TWu_Yuan	/	Abin	10.08.28
△	ECN1009240074	修改尺寸小数点位数为一位	Andy.Pi	/		2010.09.24

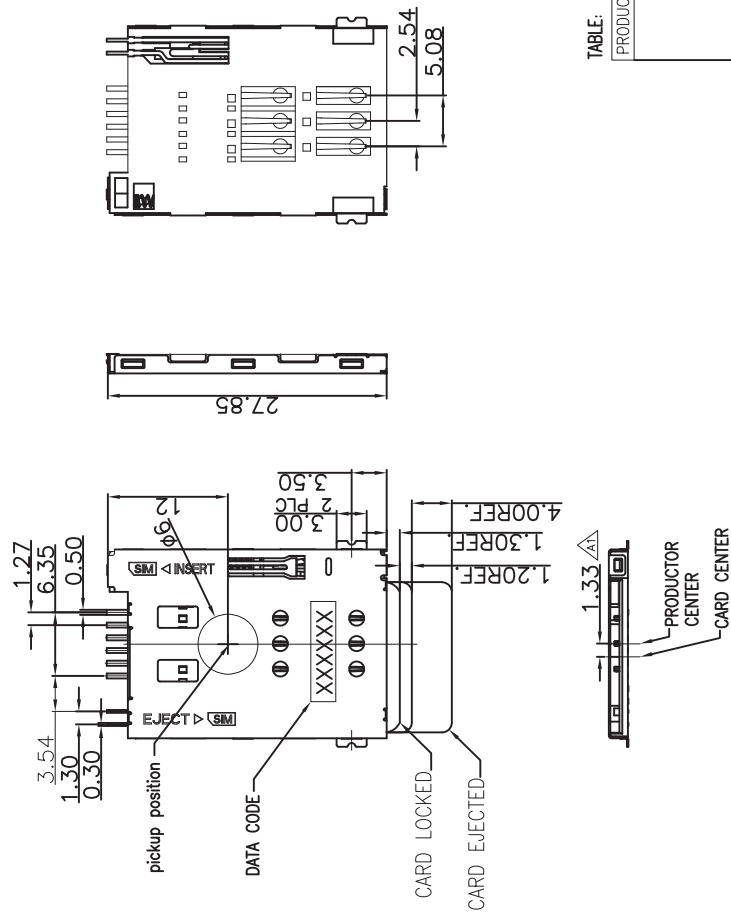

- SPECIFICATIONS:(DOC. No.:LK-SP-SIM CARD-003)
 INSULATION RESISTANCE: 500MΩ min.AT DC 500V DC
 WITHSTANDING VOLTAGE: 250V ACrms FOR 1 MINUTE
 CONTACT RESISTANCE: 100M max. AT 10MA/20mV max
 CURRENT RATING: 0.5A
 VOLTAGE RATING: 5.0 vrms
 OPERATING TEMP. RANGE: -55 C+85 C
 MATING CYCLES: 5000 INSERTIONS
- MATERIAL:
 INSULATOR: H-TEMPERATURE PLASTIC,UL 94V-0,
 COLOR:BLACK
 TERMINAL: COPPER ALLOY,T=0.15mm
 SHELL: STAINLESS STEEL,T=0.15mm
- FINISH:
 TERMINAL:50μ" min NICKEL UNDERPLATED ON ALLOYER,GOLD PLATING
 ON CONTACT ARER, 80μ"min TIN ON SOLDER TAIL.
 SHELL:50μ" NICKEL UNDERPLATED ON ALLOYER, GOLD FLASH ON SOLDER
 LATCH
- OTHER:
 DATE CODE:XXXXXX
 YEAR
 MONTH
 DATE

TABLE:

PRODUCT NO.	ITEM	PART NO.	PART NAME	QTY	Material
CSN51S060R-W	1	PS211B3640-W	SHELL	1	SUS304,T=0.15mm Ni PLATED 50U"Min焊接面(鍍金) salt spray 24H
	2	CSN49S0601-W	SEMI-PRODUCT	1	LCP+30%, BLACK,GOLD 15U"
	3	PP502B0010	SLIDER	1	PA9T+30%G.F,UL94V_0, BLACK
	4	PS106B1780-W	CONTACT	6	C5210R-H,T=0.15mm,GOLD 15U" salt spray 24H
	5	PS000B0310-W	LINK	1	SUS304,φ=0.3mm,salt spray 24H
	6	PS62B0010-W	SPRING	1	SWP-B,φ=0.25mm, BLACK Zn PLATED 30U"Min,salt spray 24H
	7	PS106B2200-W	SWITCH1	1	C5210R-H,T=0.15mm,GOLD 15U" salt spray 24H
	8	PS106B2190-W	SWITCH2	1	C5210R-H,T=0.15mm,GOLD 15U" salt spray 24H

P/N # CSN51

Wellco T&C Co., Ltd.

SIM PIN CODE

PIN CODE	SIGNAL	DESCRIPTION	PIN CODE	SIGNAL	DESCRIPTION
C1	SIM VDD	SIM CARD POWER SUPPLY	C5	GND	CONNECT TO GND
C2	SIM RST	SIM CARD RESET	C6	VPP	NOT CONNECT
C3	SIM CLK	SIM CARD CLOCK	C7	SIM I/O	SIM CARD DATA I/O

TITLE: SIM CARD CONNECTOR 6PIN
 (PUSH TYPE,BOARD TOP) WITH SWITCH ASSEMBLY

DR: TWu_Yuan

CHK: /

APPD: /


DWG.NO. A

DWG-SIM CARD-038

FINISH SEE TABLE

PART NO. SEE TABLE

SIZE A4

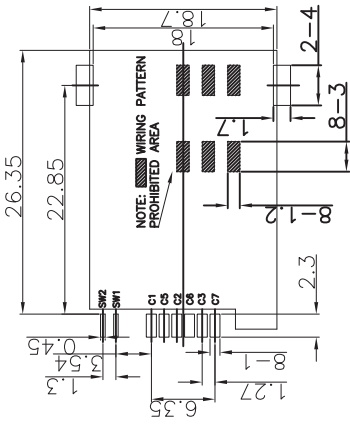

RECOMMENDED PCB LAYOUT
 ALL TOL:±0.05mm